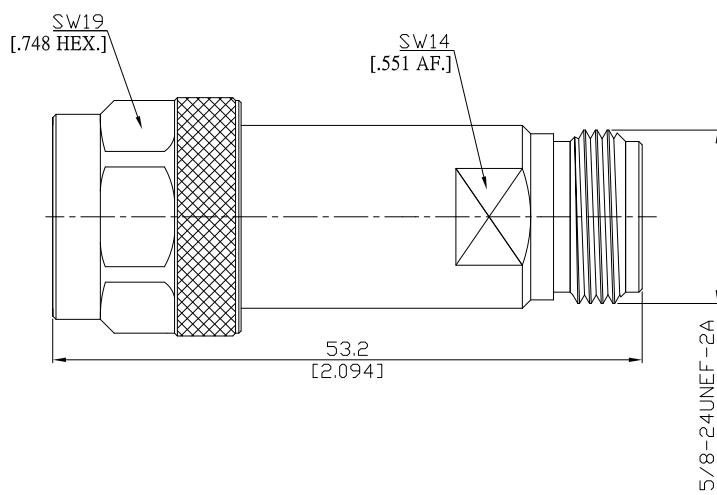


**DC Block plug/jack
N plug (male) / N jack (female)**
DB-N1N25A-18G100V/9XX-9X


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to MIL-C-39012;MIL-STD-348A/304

Electrical Data

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR (Return Loss)	≤ 1.35 (\geq 16.54 dB)
Insertion Loss	≤ 0.6 dB
Voltage rating (Volts)	DC 100 V

Mechanical Data

Coupling mechanisms	Screw-lock
Weight	0.0526 kg

Environmental Data

Temperature range	-55°C to +90°C
RoHS	compliant

Material And Plating

Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated
Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	

Packing

Single or 100