


Fixed Attenuator SMA Male To SMA Female Up To 18 GHz Rated To 5 Watts With Black Anodized Aluminum Heatsink Body

## FA-A1A25A-18G5W20 / 9XX-9X

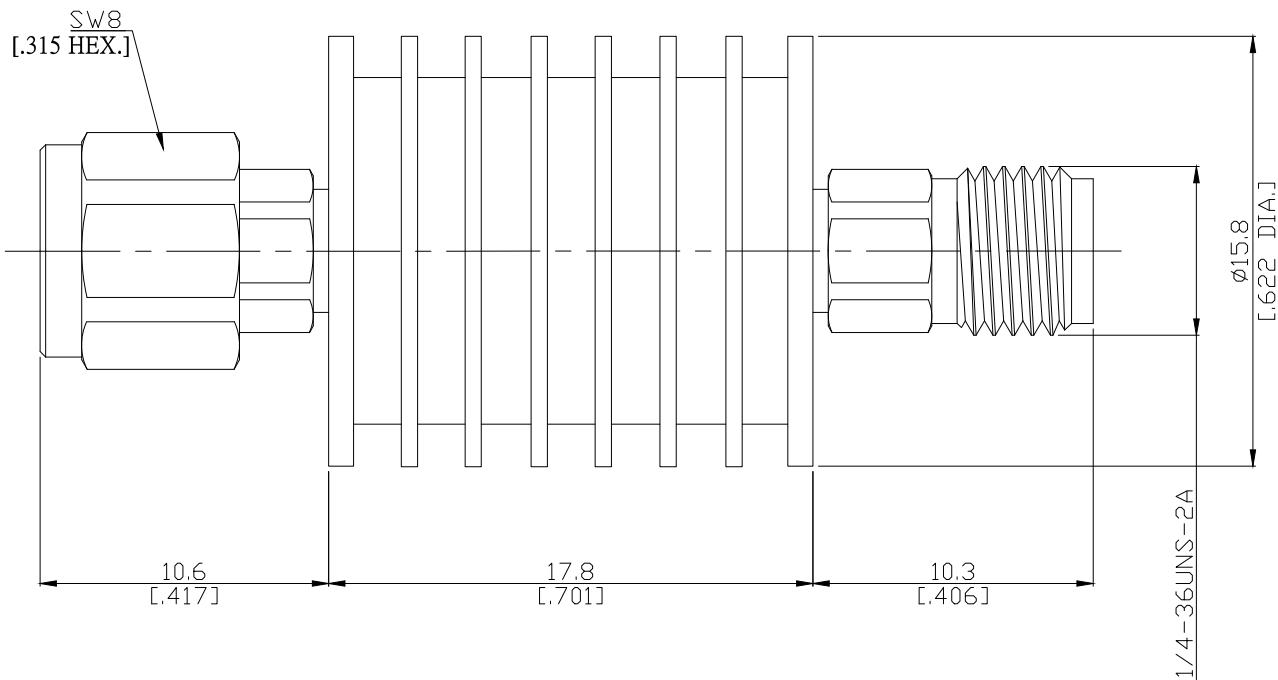

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

According to

IEC 60169-15; MIL-STD-348A/310

### Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.2 (≥ 20.8 dB)

Input Power

5 Watts @25°C

Peak power

50W (5 Pl s Pulse Width, 1% Duty Cycle)

Frequency (GHz)	18
VSWR	1.2
Nominal Attenuation (dB)	20
Deviation (± dB)	-0.6/+0.8

### Material And Plating

#### Piece Parts

#### Material

#### Plating

Centre Contact

Beryllium Copper

Gold plating, 3 µinch  
(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Stainless Steel

Passivated

Insulator

PTFE

Gasket

Silicone Rubber

Coupling Nut

Stainless Steel

Passivated

#### Piece Parts

#### Material

#### Plating

Centre Contact

Beryllium Copper

Gold plating, 3 µinch  
(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Stainless Steel

Passivated

Insulator

PTFE

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Rosnol RF/Microwave Technology Co., Ltd.

[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)

Date:

+886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

## Fixed Attenuator SMA Male To SMA Female Up To 18 GHz Rated To 5 Watts With Black Anodized Aluminum Heatsink Body

## FA-A1A25A-18G5W20 / 9XX-9X

## Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Coupling Nut Retention	≥ 270 N
Center Contact Captivation: axial	≥ 20 N
Coupling Test Torque	1.70 Nm max.
Recommended Torque	0.9 Nm

## Environmental Data

Temperature Range	-55°C to + 125°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

## Packing

Single or 100