


Fixed Attenuator 2 Watt
 SMA plug (male) / SMA jack (female)

FA-A1A25A-8G2W9/911-91

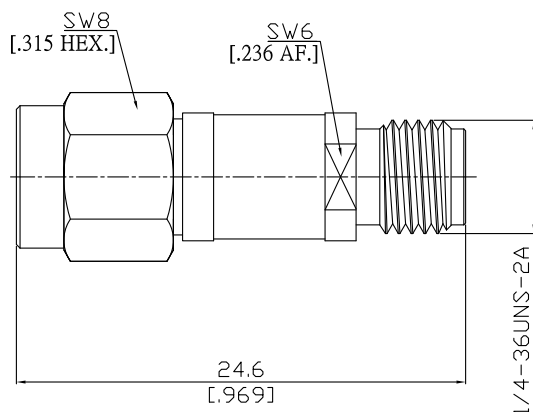

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-15; MIL-C-39012; MIL-STD-348A/310

Electrical Data

 Impedance 50 Ω
 Interface frequency max. DC to 8 GHz
 VSWR (Return Loss) ≤ 1.30 (≥ 17.69 dB)
 Power handling (Watt) 2 Watts average to 25 °C

Maximum Deviation Over Frequency

Nominal ATTN (dB)	Deviation (dB)
1-10	± 0.7
11-30	± 0.7

Mechanical Data

 Coupling mechanisms Screw-lock
 Weight 0.0053 kg

Environmental Data

 Temperature range -55 °C to +125 °C
 RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Nickel underplated)
Body	Brass	Gold plating (Nickel underplated)
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Gold plating (Nickel underplated)
Resistor	Thick film	

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Nickel underplated)
Body	Brass	Gold plating (Nickel underplated)
Insulator	PTFE	

Packing

Single or 100