




Fix Attenuator SMA plug (male) / SMA jack (female)
1Watts Up to 18 GHz, VSWR \leq 1.35

FA-A1A25B-18G1W10 / 9XX-9X

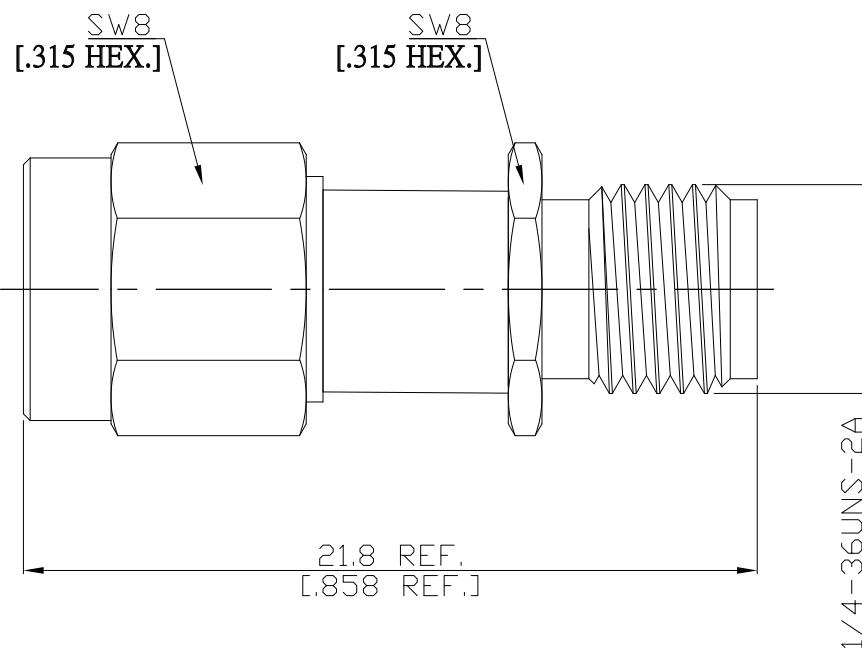

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

IEC 60169-15;CECC 22110; MIL-PRF-39012 SMA; MIL-STD-348/310

Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

\leq 1.35(\geq 16.54 dB)

Test voltage

1000 V rms

Working voltage

480 V rms

Power Rating

1 W

Accuracy Of Attenuation & Power

Nominal Attenuation (dB)	10			
Deviation (\pm dB)	0.5			

Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated
Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Body	Stainless Steel	Passivated
Insulator	PTFE	

Fix Attenuator SMA plug (male) / SMA jack (female)
1Watts Up to 18 GHz, VSWR \leq 1.35

FA-A1A25B-18G1W10 / 9XX-9X

Mechanical Data

Coupling mechanisms	Screw-lock
Mating cycles	\geq 500
Center contact captivation: axial	\geq 27 N
radial	\geq 3 Ncm
Coupling test torque	\leq 1.7 Nm
Recommended torque	0.8 Nm to 1.1 Nm

Environmental Data

Temperature Range	-65°C to +125°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100