


Fixed Attenuator plug/jack
BNC plug (male) / BNC jack (female)

FA-B1B25A-4G2W8/944-94

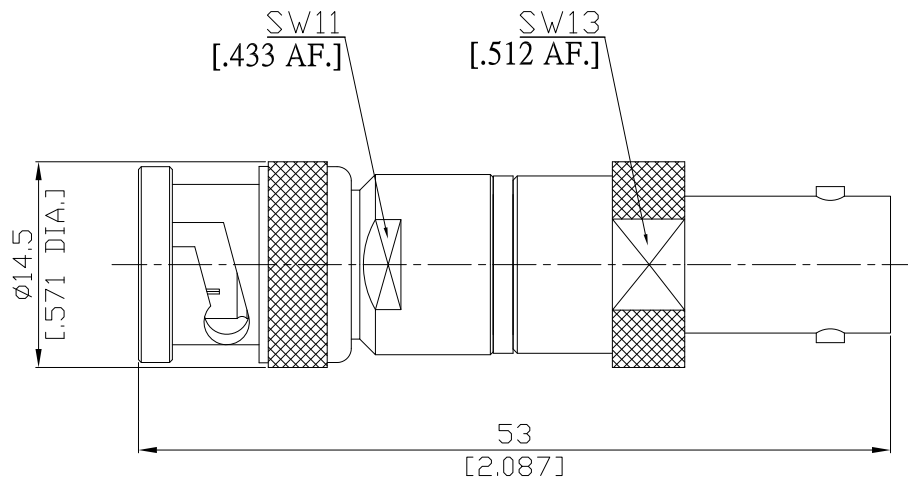

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

MIL-C-39012;MIL-STD-348A/301

Electrical Data

Impedance	50 Ω	
Attenuation	8 dB	
Frequency	DC to 4 GHz	2 to 4 GHz
Frequency sub range	DC to 2 GHz	≤ 1.20 (≥ 20.8 dB)
VSWR (Return Loss)	≤ 1.15 (≥ 23.13 dB)	
Attenuation deviation	± 0.4 dB	± 0.5 dB
Power rating	2 Watt average power up to 30 °C	

Mechanical Data

Coupling mechanisms	Bayonet-lock
Weight	N/A

Environmental Data

Temperature range	-55°C to +130°C
RoHS	compliant

Material And Plating

Piece Parts (BNC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Brass	Copper-Tin-Zinc Alloy
Piece Parts (BNC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

Packing

Single or 100