


10 dB Fixed Attenuator, 2.92 mm Plug (Male) to 2.92 mm Jack (Female),
DC to 40 GHz, 20 W

FA-K1K25A-40G20W10 / 9XX-9X

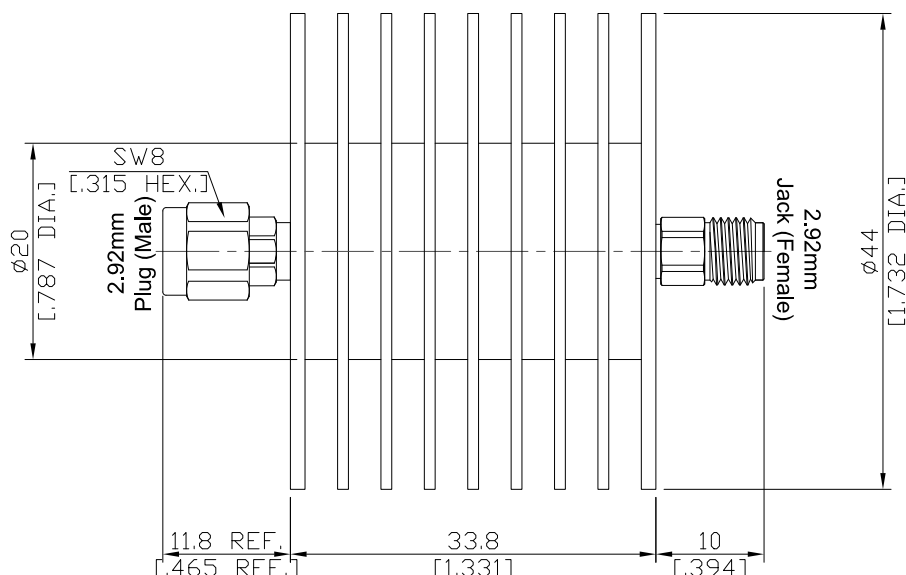

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-35; IEEE Std 287

Electrical Data

Impedance

50 Ω

Frequency

DC to 40 GHz

VSWR (Return Loss)

≤ 1.3 (≥ 17.69 dB)

Average power at 25°C

20 W

Peak power

200 Watts (5 µSec Pulse Width , 10% Duty Cycle)

Accuracy Of Attenuation & Power

Nominal Attenuation (dB) 10

Deviation (± dB) 1.5

Material And Plating

Piece Parts (2.92mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating
Body	Stainless Steel	Passivated
Gasket	Silicone Rubber	
Insulator	PEI	
Coupling nut	Stainless Steel	Passivated
Heatsink	Aluminum	Black anodized
Piece Parts (2.92mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating
Body	Stainless Steel	Passivated
Insulator	PEI	

10 dB Fixed Attenuator, 2.92 mm Plug (Male) to 2.92 mm Jack (Female),
DC to 40 GHz, 20 W

FA-K1K25A-40G20W10 / 9XX-9X

Mechanical Data

Coupling mechanisms	Screw-On
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 20 N
Coupling Test Torque	max. 1.70 Nm
Recommended Torque	0.9 Nm

Environmental Data

Temperature Range	-55°C to + 125°C
RoHS	compliant

Packing

Single or 100