


Fixed Attenuator N Male To N Female Up To 11 GHz Rated To 2 Watts

## FA-N1N25A-11G2W20 / H33-H3

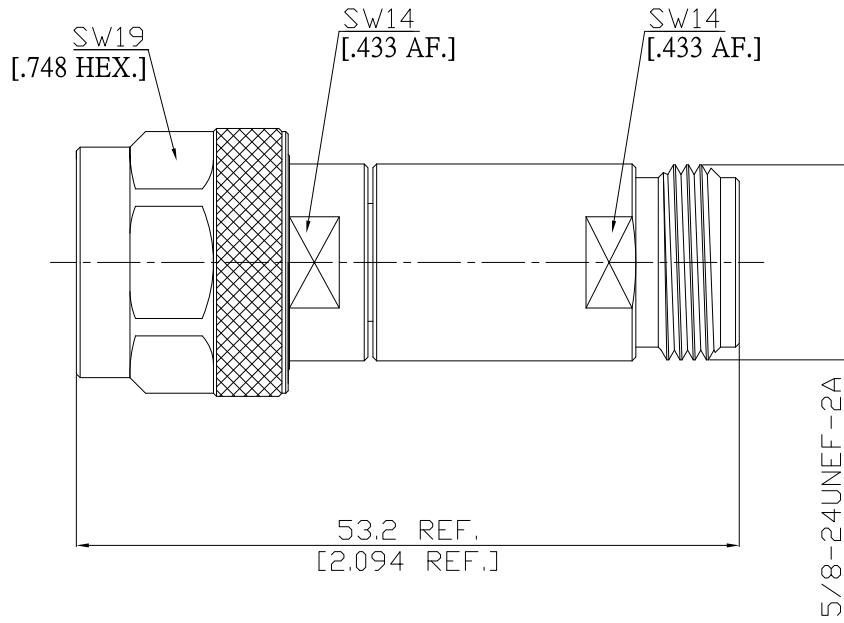

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

## Interface

According to

IEC 60169-16; MIL-STD-348/304; CECC 22 210

## Electrical Data

Impedance	50 Ω
Frequency	DC to 11 GHz
VSWR (Return Loss)	≤ 1.35 (≥ 16.54 dB)
Input Power	2 Watts

## Accuracy Of Attenuation &amp; Power

Nominal Attenuation (dB)	20
Deviation (± dB)	0.5

## Material And Plating

Piece Parts	Material	Plating
Centre Contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 100 µinch)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Brass	Nickel
Piece Parts	Material	Plating
Centre Contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Nickel
Insulator	PTFE	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Rosnol RF/Microwave Technology Co., Ltd.

[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

Date:

NOV/18/2024

Fixed Attenuator N Male To N Female Up To 11 GHz Rated To 2 Watts

**FA-N1N25A-11G2W20 / H33-H3****Mechanical Data**

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Coupling Nut Retention	≥ 450 N
Center Contact Captivation: axial	≥ 28 N
Coupling Test Torque	1.70 Nm max.
Recommended Torque	0.7 Nm to 1.1 Nm

**Environmental Data**

Temperature Range	-55°C to + 125°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

**Packing**

Single or 100