


20 dB Fixed Attenuator, N Plug (Male) to N Jack (Female),
DC-3 GHz, 500 W

FA-N1N25A-3G500W20 / 933-93

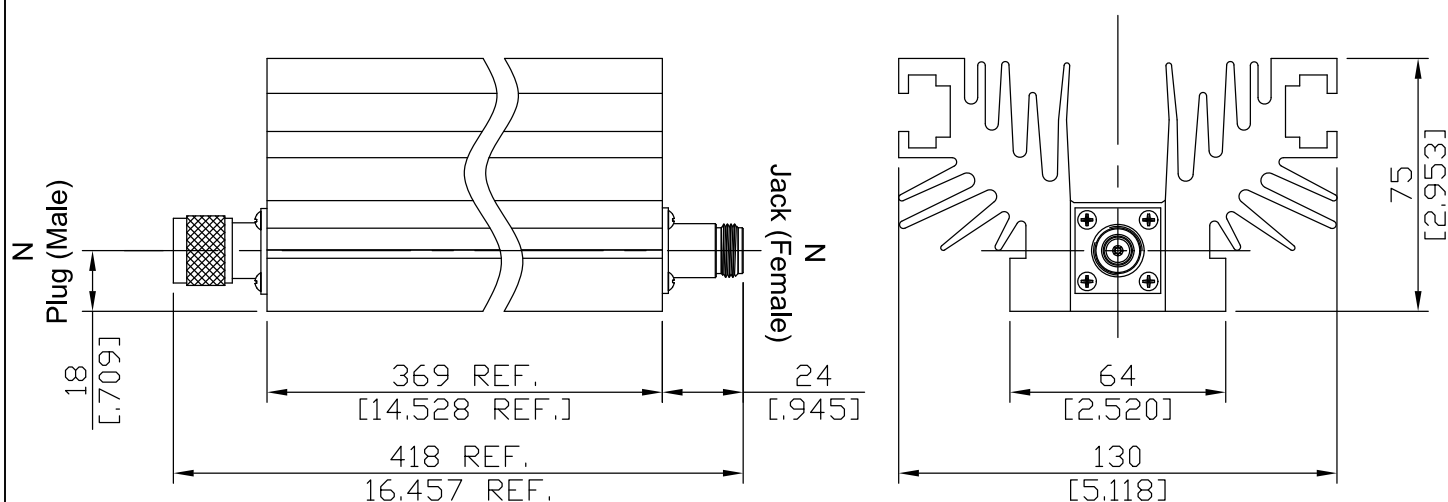

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-16; MIL-STD-348B/304; CECC 22210; MIL-PRF-39012

Electrical Data

Impedance

50 Ω

Frequency

DC to 3 GHz

VSWR

≤ 1.3 (≥ 17.69 dB)

Average power at 25°C

500W

Accuracy Of Attenuation & Power

Nominal Attenuation(dB)	20
Deviation ($\pm$ dB)	-1.0/+1.2

Material And Plating

Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Nickel
Heatsinks	Aluminum	Black anodized
Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating
Body	Brass	Nickel
Insulator	PTFE	

20 dB Fixed Attenuator, N Plug (Male) to N Jack (Female),
DC-3 GHz, 500 W

FA-N1N25A-3G500W20 / 933-93

Mechanical Data

Coupling Mechanisms	Screw-On
Mating Cycles	≥ 500
Coupling Nut Retention	≥ 450 N
Center contact captivation: axial	≥ 28 N
Coupling test torque	max. 1.70 Nm
Recommended torque	1.0 Nm
Weight	4.5 Kg

Environmental Data

Temperature Range	-55°C to +125°C
RoHS	compliant

Packing

Single or 100