


Fixed Attenuator N Female To N Female Up To 4 GHz Rated To 100 Watts 10dB

FA-N2N25A-4G100W10 / 93-93

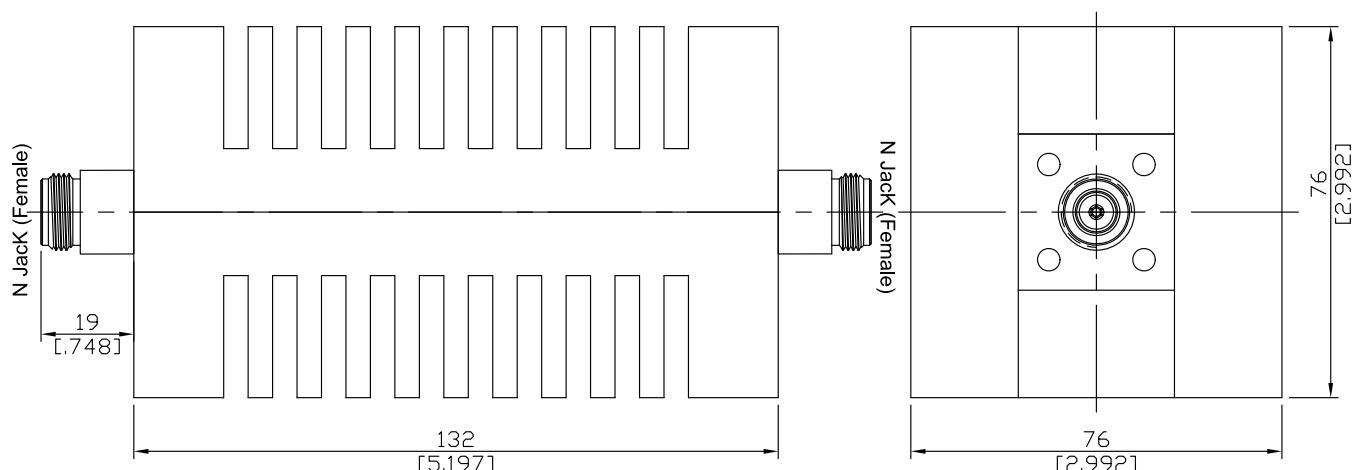

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-16; MIL-STD-348B/304; CECC 22210; MIL-PRF-39012

Electrical Data

Impedance

50 Ω

Frequency

DC to 4 GHz

VSWR (Return Loss)

≤ 1.3 (≥ 17.69 dB)

Power rating

100Watts Average at 25°C

Accuracy Of Attenuation & Power

Nominal Attenuation(dB)	10
Deviation ($\pm$ dB)	0.75

Material And Plating

Piece Parts (N)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating
Body	Brass	Nickel
Insulator	PTFE	
Heatsink	Aluminum	Black anodized
Piece Parts (N)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating
Body	Brass	Nickel
Insulator	PTFE	

Fixed Attenuator N Female To N Female Up To 4 GHz Rated To 100 Watts 10dB

FA-N2N25A-4G100W10 / 93-93

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Coupling Nut Retention	≥ 450 N
Center Contact Captivation: axial	≥ 28 N
Coupling Test Torque	1.70 Nm max.
Recommended torque	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-55°C to + 125°C
RoHS	compliant

Packing

Single or 100