


30 dB Fixed Attenuator, Precision SMA Plug (Male) to Precision SMA Jack (Female),
DC – 26.5 GHz, 10 W

FA-PCA1PCA25A-26.5G10W30 / 933-93

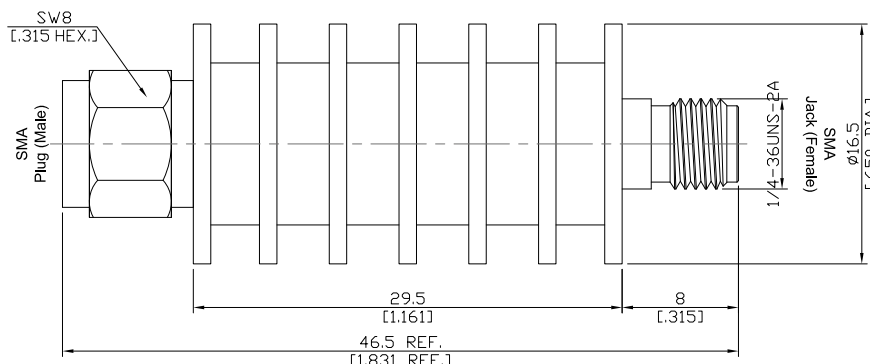

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-15; CECC 22110; MIL-PRF-39012; MIL-STD-348B/310; EN 122110

Electrical Data

Impedance

50 Ω

Frequency

DC to 26.5 GHz

VSWR (Return Loss)

≤ 1.35 (≥ 16.54 dB)

Average Power at 25°C

10 W

Peak Power

1000 W (5 μSec Pulse Width , 0.5% Duty Cycle)

Accuracy Of Attenuation & Power

Nominal Attenuation(dB) 30

Deviation (± dB) 1.2

Material And Plating

Piece Parts	Material	Plating
Centre Contact	Beryllium Copper	Gold plating
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Brass	Nickel
Heatsink	Aluminum	Black anodized

Piece Parts	Material	Plating
Centre Contact	Beryllium Copper	Gold plating
Body	Brass	Nickel
Insulator	PTFE	

Mechanical Data

Coupling mechanisms	Screw-On
Mating Cycles	≥ 500
Center contact captivation: axial	≥ 27 N
Coupling Test Torque	max. 1.70 Nm
Recommended Torque	0.57 Nm

Environmental Data

Temperature Range	-55°C to + 125°C
RoHS	Compliant

Packing

Single or 100