


Fixed Attenuator plug/jack
N plug (male) / N jack (female)

FA-PCN1PCN25A-18G2W7/9XX-9X

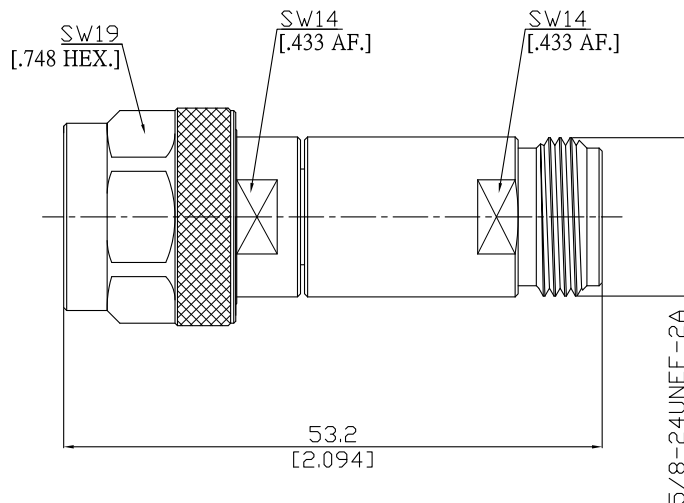

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to MIL-C-39012;MIL-STD-348B/402

Electrical Data

Impedance	50 Ω				
Attenuation	7 dB				
Frequency	DC to 18 GHz				
Frequency sub range	DC to 4 GHz	4 to 6 GHz	6 to 8 GHz	8 to 12.4 GHz	12.4 to 18 GHz
VSWR (Return Loss)	≤ 1.11 (≥ 25.65 dB)	≤ 1.11 (≥ 25.65 dB)	≤ 1.15 (≥ 23.13 dB)	≤ 1.15 (≥ 23.13 dB)	≤ 1.25 (≥ 19.08 dB)
Attenuation deviation	± 0.3 dB	± 0.4 dB	± 0.4 dB	± 0.5 dB	± 0.8 dB
Power rating	2 Watt average power up to 30 °C				

Mechanical Data

Coupling mechanisms	Screw-lock
Weight	N/A

Environmental Data

Temperature range	-55°C to +130°C
RoHS	compliant

Material And Plating

Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Stainless Steel	Passivated
Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	

Packing

Single or 100

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.: Rosnol RF/Microwave Technology
www.rosnol.com ; info@rosnol.com
Date: 19/11/12
Phone:+886-3-463-5095
Fax:+886-3-463-5952

Page

1/1