


Fixed Attenuator TNC Plug (male) / TNC Jack (Female) DC-6 GHz VSWR 1.3

## FA-T1T25A-6G150W40 / H33-H3

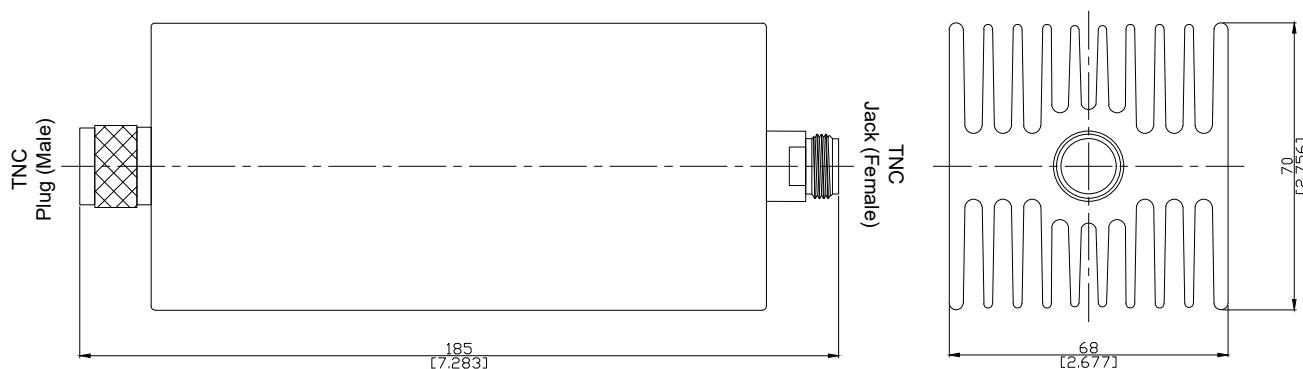

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

According to

IEC 61169-17; CECC 22 200; MIL-PRF-39012; TNC-Interface MIL-STD-348/313

### Electrical Data

Impedance

50 Ω

Frequency

DC to 6 GHz

VSWR

≤ 1.3 (≥ 17.69 dB)

Center contact resistance

≤ 1.5 mΩ

Outer contact resistance

≤ 1 mΩ

Power handling (Watt)

150 Watts average to 25 °C

### Accuracy Of Attenuation & Power

| Nominal Attenuation(dB) | 3   | 6   | 10  | 20  | 30  | 40  |
|-------------------------|-----|-----|-----|-----|-----|-----|
| Deviation (± dB)        | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 |

### Material And Plating

| Piece Parts (TNC) | Material        | Plating        |
|-------------------|-----------------|----------------|
| Centre contact    | Phosphor Bronze | Gold plating   |
| Body              | Brass           | Nickel         |
| Insulator         | PTFE            |                |
| Gasket            | Silicone Rubber |                |
| Coupling nut      | Brass           | Nickel         |
| Heatsink          | Aluminum        | Black anodized |
| Piece Parts (TNC) | Material        | Plating        |
| Centre contact    | Phosphor Bronze | Gold plating   |
| Body              | Brass           | Nickel         |
| Insulator         | PTFE            |                |

Fixed Attenuator TNC Plug (male) / TNC Jack (Female) DC-6 GHz VSWR 1.3

## FA-T1T25A-6G150W40 / H33-H3

### Mechanical Data

|                                   |                    |
|-----------------------------------|--------------------|
| Coupling Mechanisms               | Screw-lock         |
| Mating Cycles                     | ≥ 500              |
| Center contact captivation: axial | ≥ 15 N             |
| Coupling test torque              | ≤ 1.7 Nm           |
| Recommended torque                | 0.46 Nm to 0.69 Nm |

### Environmental Data

|                     |                                      |
|---------------------|--------------------------------------|
| Temperature Range   | -65°C to +165°C                      |
| Thermal shock       | MIL-STD-202, Method 107, Condition B |
| Corrosion           | MIL-STD-202, Method 101, Condition B |
| Vibration           | MIL-STD-202, Method 204, Condition B |
| Shock               | MIL-STD-202, Method 213, Condition G |
| Moisture resistance | MIL-STD-202, Method 106              |
| RoHS                | compliant                            |

### Packing

Single or 100