
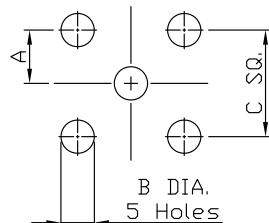
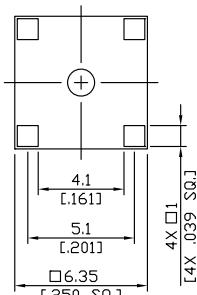


10-32 Jack (Female) PCB Thru Hole Connector Solder Attachment 4X 5.1mm [4X .200 inch] Mounting Dimension
 5X 1.6mm [5X .063 inch] Hole Spacing DC-2GHz

1032-2150-1250A / H3

MOUNTING DIMENSIONS

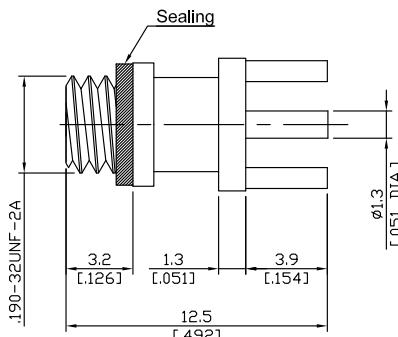

	mm	inch		
	MAX.	MIN.	MAX.	MIN.
A	2.57	2.55	.101	.100
B	1.7	1.6	.067	.063
C	5.13	5.10	.202	.200

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

N/A

Electrical Data

Impedance

50 Ω

Frequency

DC to 2 GHz

Material And Plating

Piece Parts

Material

Plating

Centre Contact

Phosphor Bronze

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Brass

Nickel

Insulator

PTFE

Gasket

Silicone Rubber

Mechanical Data

Coupling Mechanisms

Screw-Lock

Mating Cycles

≥ 500

Centre Contact

Soldered

Cable Entry

Clamp

Environmental Data

Temperature Range

-55 °C to +155 °C

RoHS

compliant

Packing

Single or 100

Weight

N/A