



10-32 Jack (Female) PCB Thru Hole Connector Solder Attachment 4X 5.1mm [4X .200 inch] Mounting Dimension
4X 1.35mm [4X .053 inch] Hole Spacing DC-2GHz

1032-2IA50-2310A / H1

Mounting Dimensions

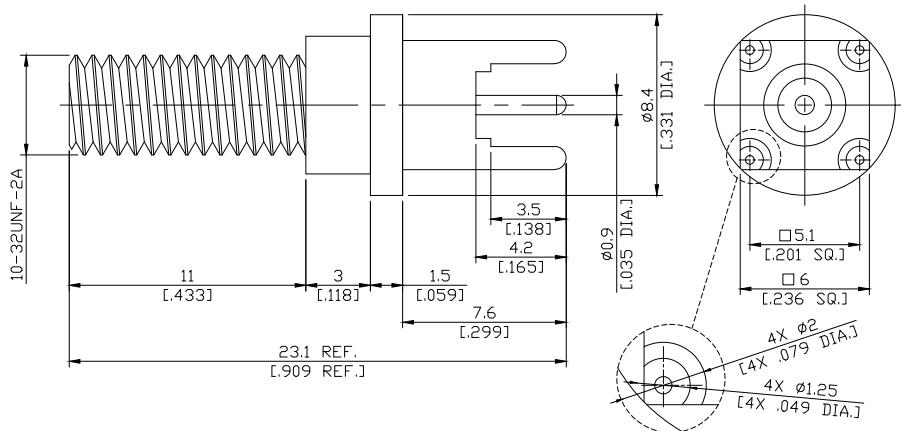

	mm		inch	
	Max.	Min.	Max.	Min.
A	1.1	1	0.043	0.039
B	1.45	1.35	0.057	0.053
C	5.15	5.05	0.203	0.199

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to N/A

Electrical Data

Impedance 50 Ω
Frequency DC to 2 GHz

Material And Plating

Piece Parts	Material	Plating
Centre Contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	

Mechanical Data

Coupling Mechanisms Screw-Lock
Mating Cycles ≥ 500
Centre Contact Soldered
Cable Entry Clamp

Environmental Data

Temperature Range -55°C to +155°C
RoHS compliant

Packing

Single or 100

Weight

N/A