


## 2.92mm Jack (female) Connector PCB End Launch Straight DC-40GHz

## K2HA50-1892E / 9X

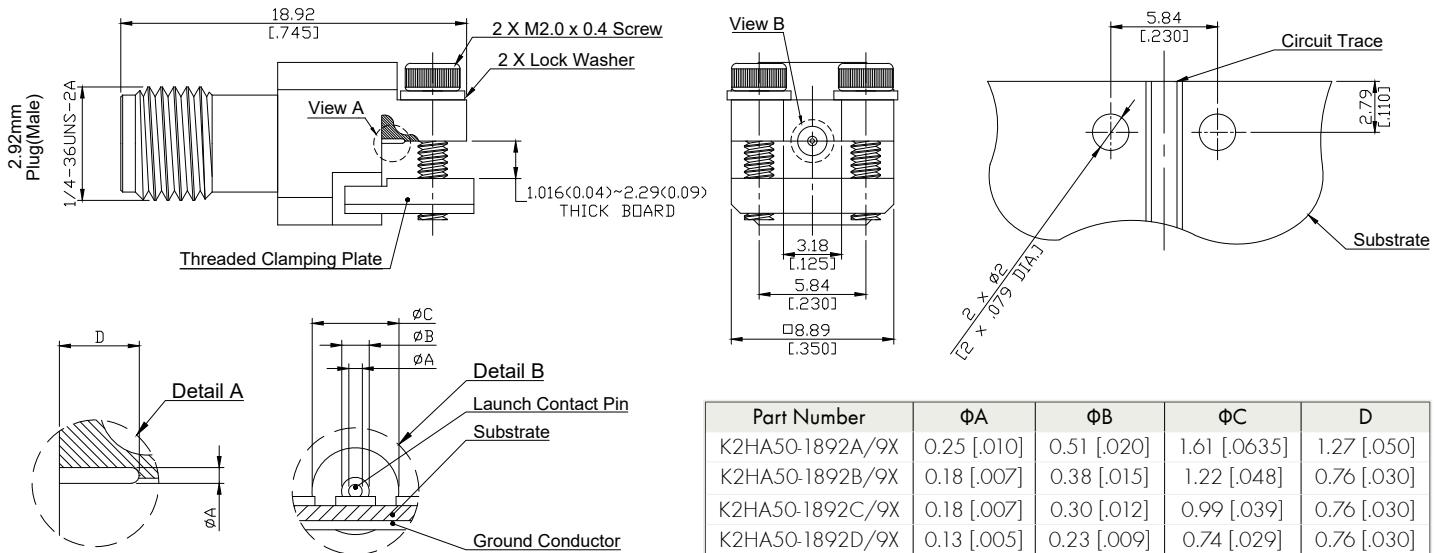

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 61169-40

**Electrical Data**

Impedance

50 Ω

Frequency

DC to 40 GHz

VSWR (Return Loss)

≤ 1.25 (≥ 19.08 dB)

Insertion Loss

≤ 0.05 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Test Voltage

750 V rms

Working voltage

250 V rms

RF-leakage

≥ 100 dB up to 1 GHz

**Material And Plating**

| Connector parts (2.92mm Connector) | Material         | Plating  |
|------------------------------------|------------------|--|
| Centre contact                     | Beryllium Copper | Gold plating, 3 µinch<br>(Non-magnetic nickel-phosphorus underplating, 80 µinch) |
| Body                               | Stainless Steel  | Passivated   |
| Insulator                          | PEI              |  |
| Connector parts (Transition Block) | Material         | Plating  |
| Launch Pin                         | Beryllium Copper | Gold plating, 3 µinch<br>(Non-magnetic nickel-phosphorus underplating, 80 µinch) |
| Transition Block                   | Brass            | Nickel   |
| Transition Block Insulator         | PTFE             |  |

## 2.92mm Jack (female) Connector PCB End Launch Straight DC-40GHz

## K2HA50-1892E / 9X

## Mechanical Data

|                                   |                    |
|-----------------------------------|--------------------|
| Coupling mechanisms               | Screw-lock         |
| Mating Cycles                     | ≥ 500              |
| Center Contact Captivation: axial | ≥ 20 N             |
| Coupling Test Torque              | 1.65 Nm            |
| Recommended Torque                | 0.80 Nm to 1.10 Nm |

## Environmental Data

|                     |                                      |
|---------------------|--------------------------------------|
| Temperature Range   | -55°C to +165°C                      |
| Corrosion           | MIL-STD-202, Method 101, Condition B |
| Vibration           | MIL-STD-202, Method 204, Condition D |
| Shock               | MIL-STD-202, Method 213, Condition I |
| Moisture Resistance | MIL-STD-202, Method 106              |
| RoHS                | compliant                            |

## Packing

Single or 100