



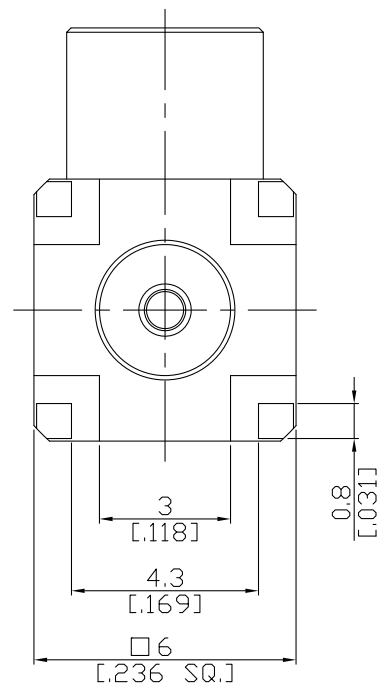

**MCX Jack (Female) Right Angle Connector  
Solder Pin Through Hole PCB**

**MCX2I59-0940A/H4**

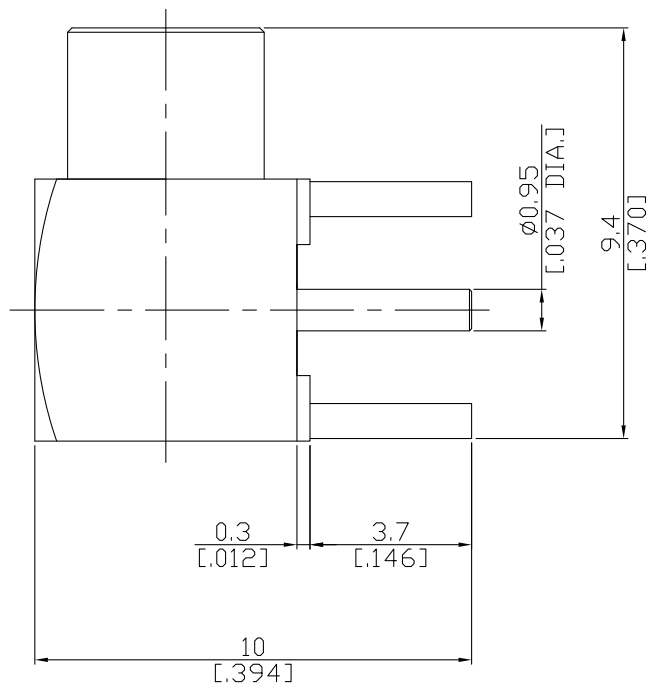

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to IEC 61169-36

**Electrical Data**

Impedance 50 Ω  
Frequency DC to 6 GHz

**Mechanical Data**

Coupling mechanisms Snap-lock  
Board mounting type Through Holes  
Weight 0.0017 kg

**Environmental Data**

Temperature range -55°C to +155°C  
RoHS compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

**Packing**

Single or 100

**Related Document**

Mounting Dimension MD81