




## MMCX Straight PCB Plug

## MMCX1I50-0750A/11

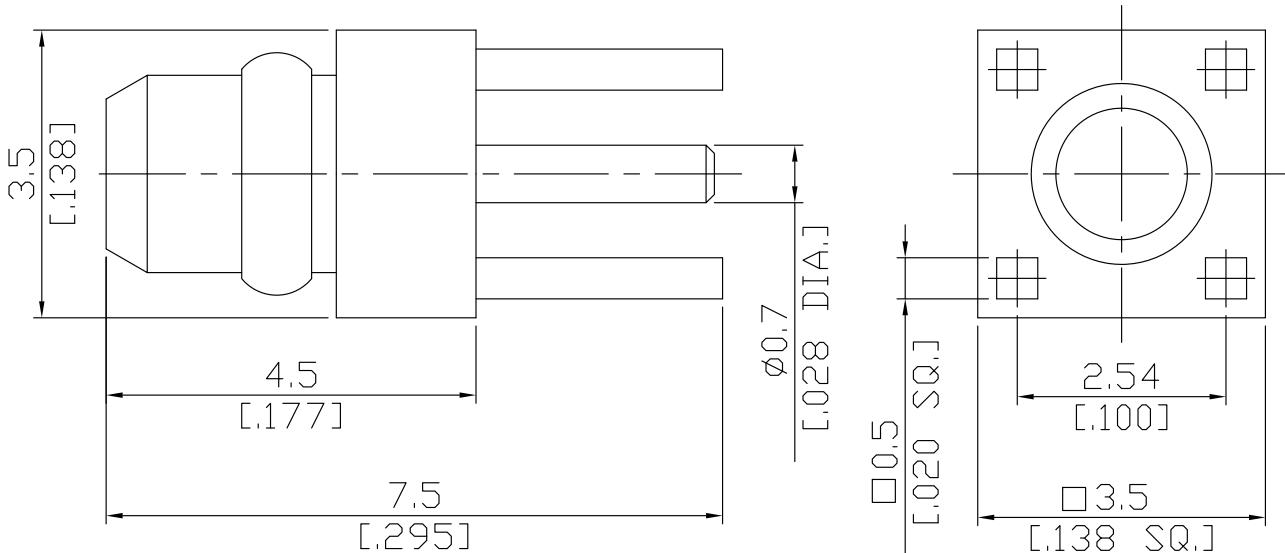

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to N/A

**Electrical Data**

 Impedance 50 Ω  
 Frequency DC to 6 GHz

**Mechanical Data**

 Coupling mechanisms Snap-lock  
 Board mounting type Through Holes  
 Weight 0.0002 kg

**Environmental Data**

 Temperature range -55°C to +155°C  
 RoHS compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	

**Packing**

Single or 100

**Related Document**

Mounting Dimension MD91