


MMCX Jack(female) PCB Through Holes Straight

**MMCX2I50-0850A / H1**

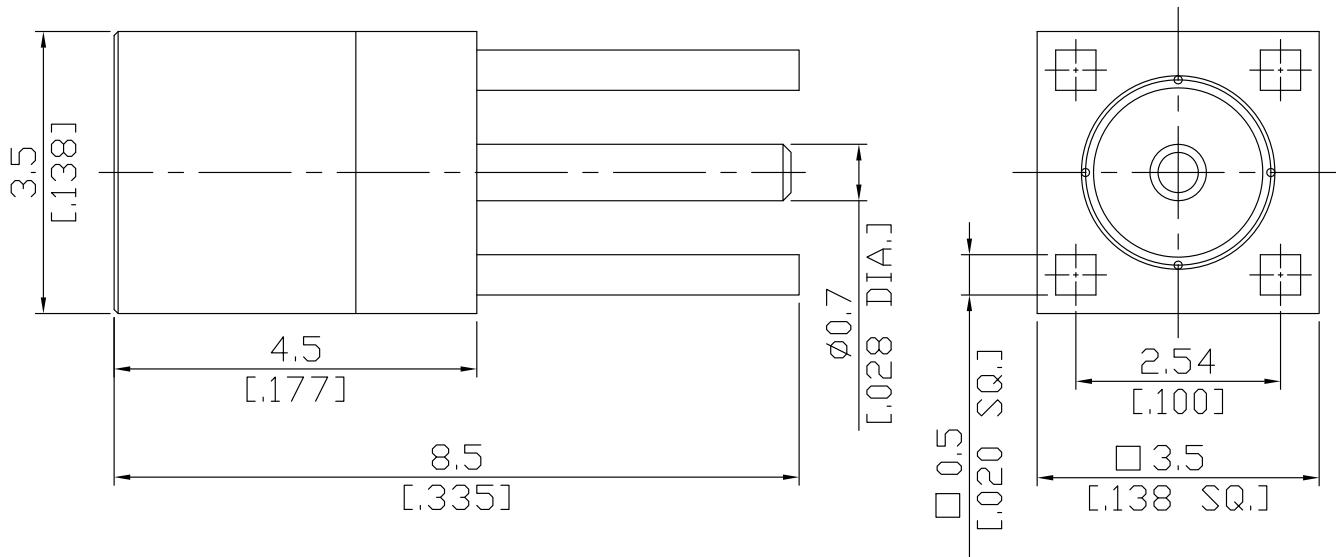

All dimensions are in mm [inch]

**Interface**

According to N/A

**Electrical Data**

Impedance 50 Ω  
Frequency DC to 6 GHz

**Mechanical Data**

Coupling mechanisms Snap-lock  
Board mounting type Through Holes  
Weight 0.0003 kg

**Environmental Data**

Temperature range -55°C to +155°C  
RoHS compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	

**Packing**

Single or 100

**Related Document**

Mounting Dimension MD91