


3.5mm Jack (Female) PCB Through Holes Straight Connector  
DC-34GHz VSWR1.25

**PC2I50-1346A / 91**

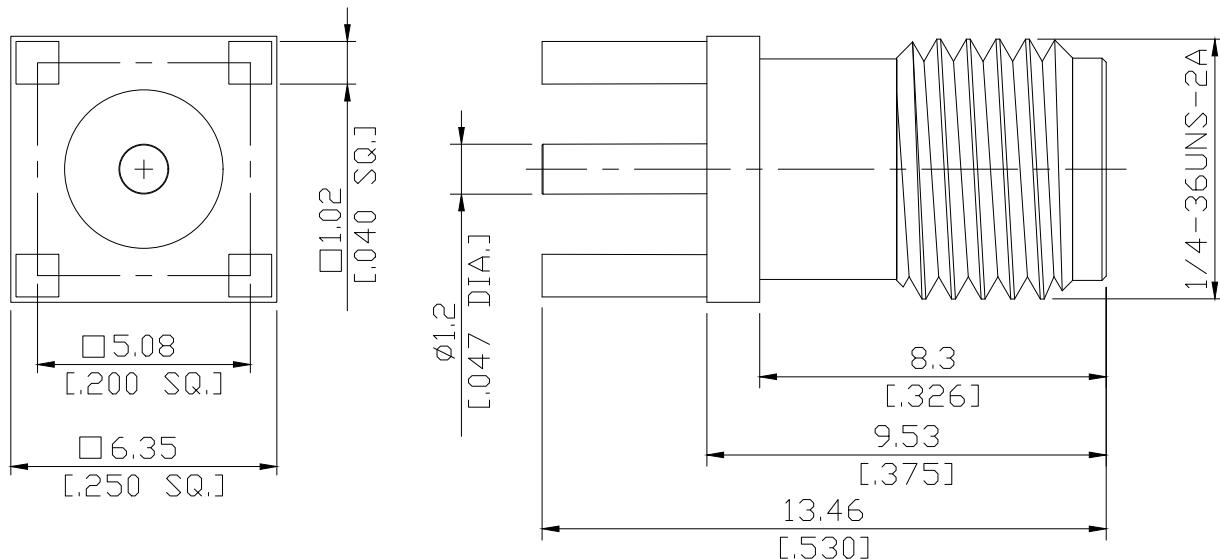

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

#### Interface

According to

IEC 61169-35, IEEE Std 287-2007

#### Electrical Data

Impedance

50 Ω

Frequency

DC to 34 GHz

VSWR (Return Loss)

≤ 1.25 ( $\geq 19.1$  dB)

Insertion Loss

≤ 0.05  $\times \sqrt{f}$  (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 3 mΩ

Outer Contact Resistance

≤ 2 mΩ

Test Voltage

750 V rms

Working voltage

250 V rms

RF-leakage

≥ 100 dB up to 1 GHz

#### Material And Plating

Connector parts (2.92mm Connector)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	

3.5mm Jack (Female) PCB Through Holes Straight Connector  
DC-34GHz VSWR1.25

## PC2I50-1346A / 91

## Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 20 N
Coupling Test Torque	1.65 Nm
Recommended Torque	0.80 Nm to 1.10 Nm

## Environmental Data

Temperature Range	-55°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

## Packing

Single or 100