
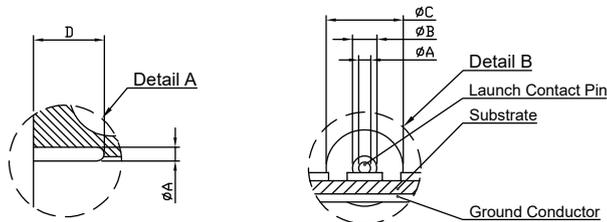


2.4mm(Female) End Launch Jack

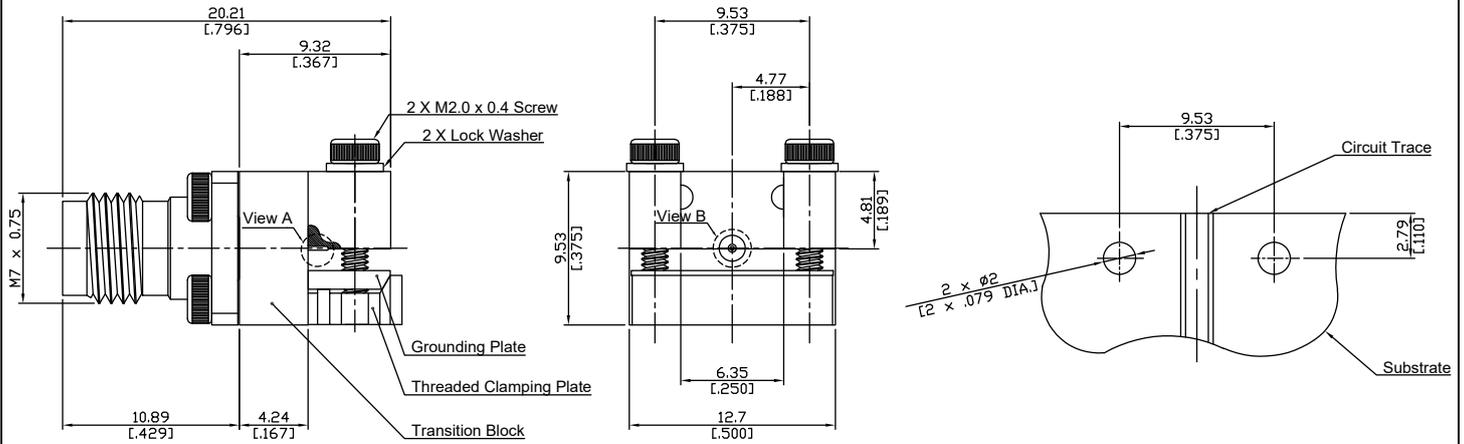

Part Number	ΦA	ΦB	ΦC	D
Q2HA50-2021A/9X	0.25 [.010]	0.51 [.020]	1.61 [.0635]	1.27 [.050]
Q2HA50-2021B/9X	0.18 [.007]	0.38 [.015]	1.22 [.048]	0.76 [.030]
Q2HA50-2021C/9X	0.18 [.007]	0.30 [.012]	0.99 [.039]	0.76 [.030]
Q2HA50-2021D/9X	0.13 [.005]	0.23 [.009]	0.74 [.029]	0.76 [.030]

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 61169-40; IEEE Std 287-2007

Electrical Data

Impedance 50 Ω
Frequency DC to 50 GHz

Mechanical Data

Board mounting type End Launch

Environmental Data

Temperature range -55°C to +135°C
RoHS compliant

Material And Plating

Connector parts (2.4mm Connector)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PEI	
Connector parts (Transition Block)	Material	Plating
Launch Pin	Beryllium Copper	Gold plating(Nickel underplated)
Transition Block	Brass	Copper-Tin-Zinc Alloy
Transition Block Insulator	PTFE	

Packing

Single

Related Document

Mounting Dimension MD 108