


SMA Jack (female) Straight PCB End Launch Hole Straight Connector DC-18GHz

SMA2H1A50-1407A / 91

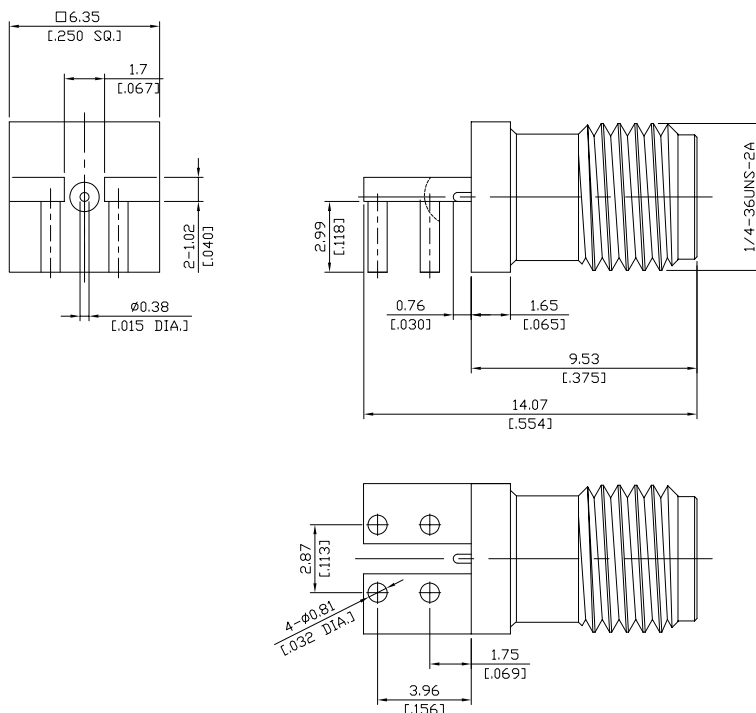

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-15; MIL-STD-348B/310

Electrical Data

Impedance	50 Ω	
Frequency	DC to 18 GHz	
VSWR (Return Loss)	≤ 1.25 (≥ 19.08 dB)	
Insertion Loss	$\leq 0.03 \times \sqrt{F}$ (GHz) dB	
Insulation Resistance	≥ 5 G Ω	
Center Contact Resistance	≤ 3.0 m Ω	
Outer Contact Resistance	≤ 2.0 m Ω	
Test Voltage (at sea level)	1000 V rms	
Working Voltage (at sea level)	480 V rms	
Power Handling (at 20 °C, sea level, VSWR 1.0)	≤ 200 W @ 2 GHz	≤ 100 W @ 10 GHz
RF Leakage	≤ 100 dB up to 1 GHz	

- VSWR in application depends decisive on PCB layout -

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Body	Brass	Nickel
Insulator	PTFE	

SMA Jack (female) Straight PCB End Launch Hole Straight Connector DC-18GHz

SMA2H1A50-1407A / 91

Mechanical Data

Coupling mechanisms	Screw-lock
Mating cycles	min. 500
Center contact captivation: axial	≥ 20 N
Board mounting type	End Launch
Coupling test torque	max. 1.7 Nm
Recommended torque	0.8 Nm to 1.1 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100