


SMA Jack (female) Connector PCB End Launch Straight
DC-27GHz - Low Profile

SMA2HA50-1892B-LP / 9X

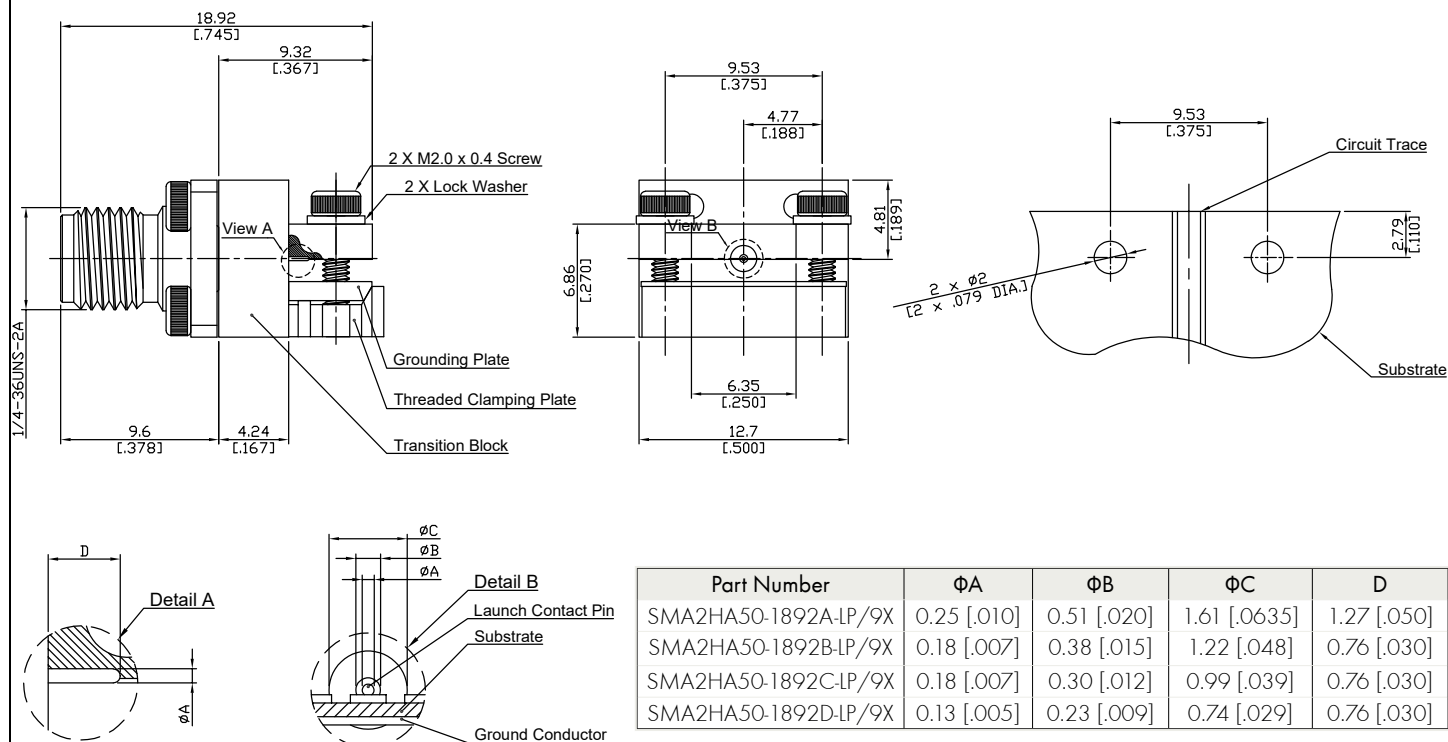

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

IEC 60169-15; MIL-STD-348B/310

Electrical Data

Impedance	50 Ω	
Frequency	DC to 27 GHz	
Insertion loss	≤ 0.3x √F (GHz) dB	
Insulation resistance	≥ 5 GΩ	
Center contact resistance	≤ 3.0 mΩ	
Outer contact resistance	≤ 2.0 mΩ	
Test voltage	1000 V rms	
Working voltage	≤ 200 W @ 2 GHz	≤ 100 W @ 10 GHz
RF-leakage	≥ 100 dB up to 1 GHz	

Material And Plating

Connector parts (SMA Connector)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch)
Body	Stainless Steel	Passivated
Insulator	PS	
Connector parts (Transition Block)	Material	Plating
Launch Pin	Beryllium Copper	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch)
Transition Block	Brass	Copper-Tin-Zinc Alloy
Transition Block Insulator	PTFE	

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:
Date: JUL/16/2021

Rosnol RF/Microwave Technology Co., Ltd.
www.rosnol.com; info@rosnol.com
Phone: +886-3-463-5095 / Fax: +886-3-463-5952
N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

SMA Jack (female) Connector PCB End Launch Straight DC-27GHz - Low Profile

SMA2HA50-1892B-LP / 9X

Mechanical Data

Coupling mechanisms	Screw-lock
Mating cycles	min. 500
Center contact captivation: axial	≥ 20 N
Board mounting type	End launch
Coupling test torque	max. 1.7 Nm
Recommended torque	0.8 Nm to 1.1 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100