


Reverse Polarity SMA Jack (RP Female) PCB Through Holes Straight DC-18 GHz

SMA7I50-1350B / 91

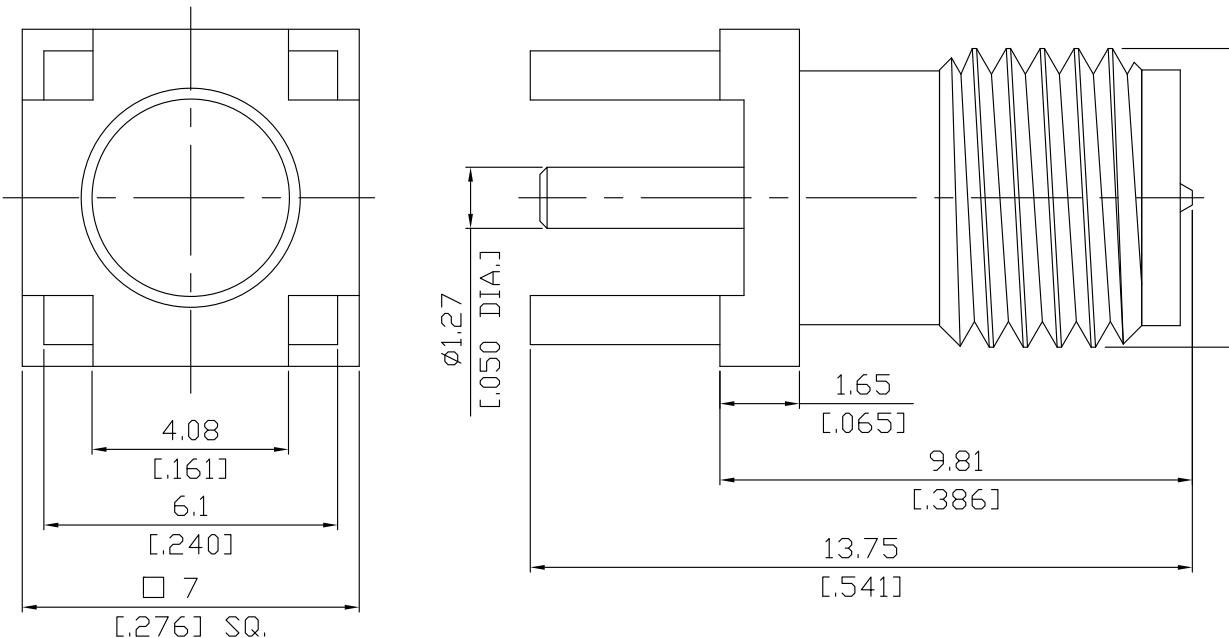

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

Derived from

IEC 60169-15; MIL-STD-348B/310

Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.15 + .015F (GHz)

Insertion Loss

≤ 0.04 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 3 mΩ

Outer Contact Resistance

≤ 2 mΩ

Test Voltage (at sea level)

1000 V rms

Working Voltage (at sea level)

480 V rms

- Electrical performance guaranteed for connector only -

Material And Plating**Piece Parts****Material****Plating**

Centre contact

Beryllium Copper

Gold plating, 3 µinch
(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Brass

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Insulator

PTFE

Reverse Polarity SMA Jack (RP Female) PCB Through Holes Straight DC-18 GHz

SMA7I50-1350B / 91

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 27 N
Coupling Test Torque	1.7 Nm max.
Recommended Torque	0.90 Nm
Board mounting type	Through Holes

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100