


## Reverse Polarity SMA Jack (RP Female) Right Angle Through Holes PCB DC-18 GHz

## SMA7I59-1510A / 11

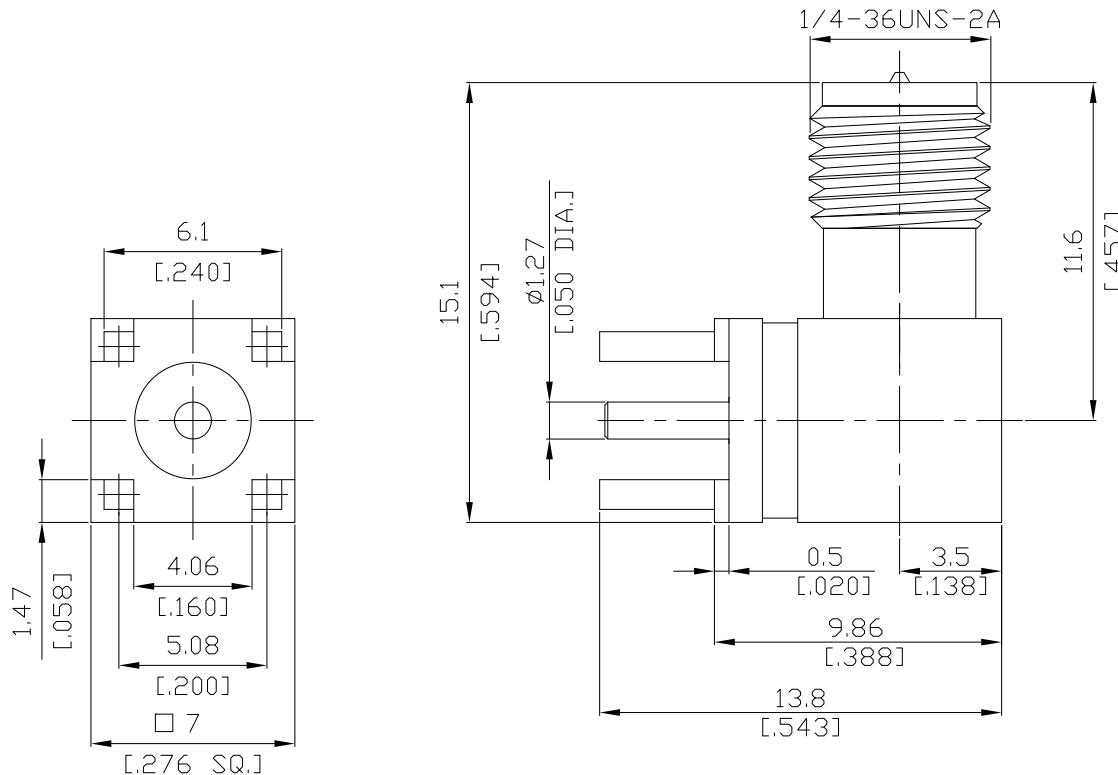

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

Derived from

IEC 60169-15; MIL-STD-348B/310

**Electrical Data**

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.15 + .015F (GHz)

Insertion Loss

≤ 0.04 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 3 mΩ

Outer Contact Resistance

≤ 2 mΩ

Test Voltage (at sea level)

1000 V rms

Working Voltage (at sea level)

480 V rms

- Electrical performance guaranteed for connector only -

**Material And Plating**

Piece Parts	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	

## Reverse Polarity SMA Jack (RP Female) Right Angle Through Holes PCB DC-18 GHz

**SMA7I59-1510A / 11****Mechanical Data**

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 27 N
Coupling Test Torque	1.7 Nm max.
Recommended Torque	0.90 Nm
Board mounting type	Through Holes

**Environmental Data**

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

**Packing**

Single or 100