


Reverse Polarity SMA Jack (RP Female) PCB Through Holes  
Right Angle For Bulkhead DC-12 GHz (Without Washer And HEX Nut)

# SMA71A59-2103B / 91

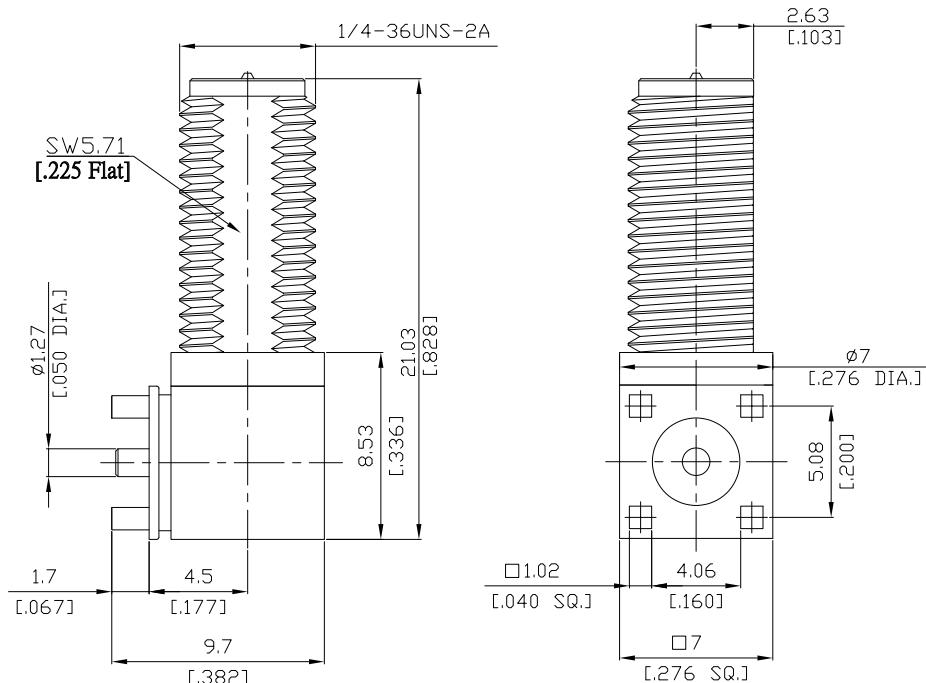

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

## Interface

Derived from

IEC 60169-15; MIL-STD-348B/310

## Electrical Data

Impedance	50 Ω
Frequency	DC to 12 GHz
VSWR (Return Loss)	≤ 1.15 + .015F (GHz)
Insertion Loss	≤ 0.04 x √F (GHz) dB
Insulation Resistance	≥ 5 GΩ
Center Contact Resistance	≤ 3 mΩ
Outer Contact Resistance	≤ 2 mΩ
Test Voltage (at sea level)	1000 V rms
Working Voltage (at sea level)	480 V rms

- Electrical performance guaranteed for connector only -

## Material And Plating

Piece Parts	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Insulator	PTFE	
Fastening nut	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Washer	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)

Reverse Polarity SMA Jack (RP Female) PCB Through Holes  
Right Angle For Bulkhead DC-12 GHz (Without Washer And HEX Nut)

**SMA71A59-2103B / 91**

**Mechanical Data**

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 27 N
Coupling Test Torque	1.7 Nm max.
Recommended Torque	0.90 Nm
Board mounting type	Through Holes

**Environmental Data**

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

**Packing**

Single or 100