


SMB Plug (male) Connector Solder Attachment
PCB Through Holes Right Angle, DC-4GHz VSWR1.29

SMB1I59-1470A / 911

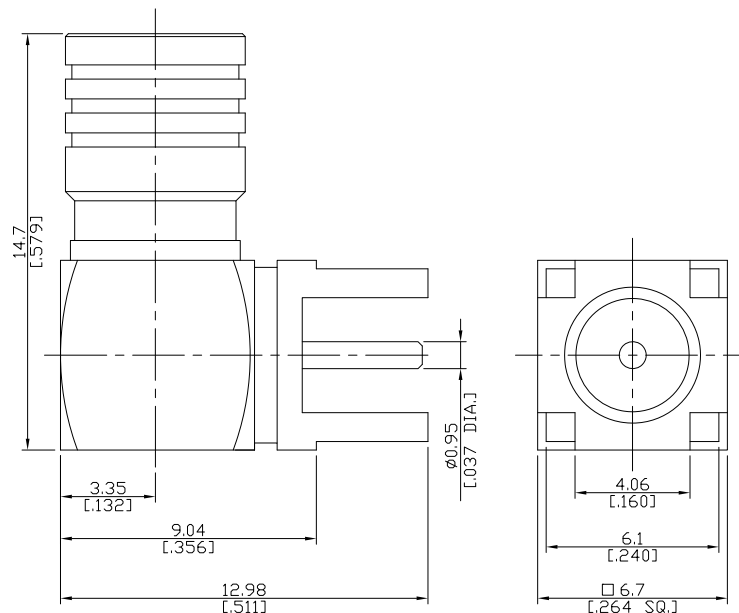

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-10, CECC 22130

MIL-STD-348B/311-1, MIL-STD-348B/311-1

Electrical Data

Impedance	50 Ω
Frequency	DC to 4 GHz
VSWR (Return Loss)	≤ 1.29 (≥ 18 dB)
Insertion Loss	≤ 0.1 × √F (GHz) dB
Insulation Resistance	≥ 1 × 10 ³ MΩ
Center Contact Resistance	≤ 5 mΩ
Outer Contact Resistance	≤ 2.5 mΩ
Test Voltage	750 V rms, 50 Hz, at sea level
Working Voltage (at sea level)	≤ 250 V rms, 50 Hz, at sea level
Contact current	1.5 A DC typ.
RF-leakage	≤ 55 dB up to 1 GHz

3 to 4 GHz

Material And Plating

Connector parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	

SMB Plug (male) Connector Solder Attachment PCB Through Holes Right Angle, DC-4GHz VSWR1.29

SMB1I59-1470A / 911

Mechanical Data

Coupling mechanisms	Snap-on
Mating Cycles	≥ 500
Centre Contact	Soldered
Captivated Type	Mechanical
Center Contact Captivation: axial	≥ 27 N
Engagement force	≥ 63 N
Disengagement force	8 N min. to 63 N max.

Environmental Data

Temperature Range	-55°C to +155°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Moisture Resistance	MIL-STD-202, Meth. 106
Max. soldering temperature	IEC 61760-1, +260°C for 10 sec.
RoHS	compliant

Packing

Single or 100