
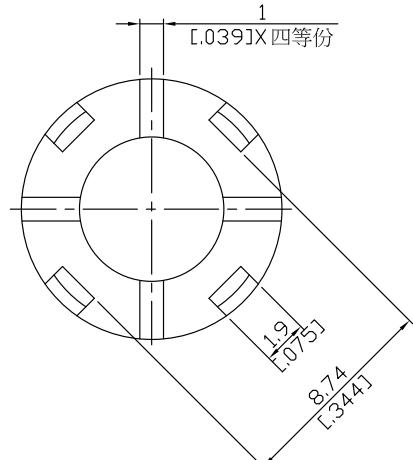


TNC Jack (female) Connector PCB Through Holes Straight
 Solder Attachment DC-4GHz VSWR≤1.20

TNC2I50-2110A / H4

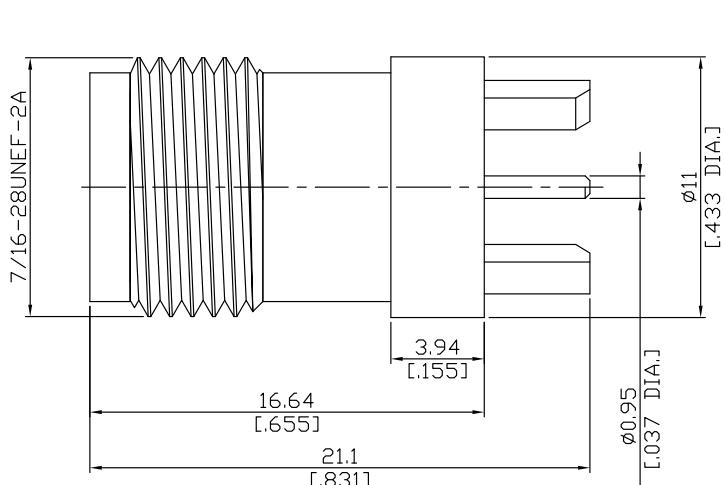

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-17, MIL-C-39012

MIL-STD-348B/313-1, MIL-STD-348B/313-2

Electrical Data

Impedance 50 Ω

Frequency DC to 4 GHz

VSWR (Return Loss) ≤ 1.20 (≥ 20.83 dB)

Insertion Loss ≤ 0.05 dB, DC to 4 GHz

Insulation Resistance ≥ 5 GΩ

Center Contact Resistance ≤ 1.5 mΩ

Outer Contact Resistance ≤ 1 mΩ

Test Voltage 1500 V rms

Working Voltage (at sea level) 500 V rms

Power Handling (at 20 °C, sea level, VSWR 1.0) ≤ 80 W @ 2 GHz

Material And Plating

| Connector parts | Material | Plating |
|-----------------|-----------------|----------------------------------|
| Centre contact | Phosphor Bronze | Gold plating(Nickel underplated) |
| Body | Brass | Copper-Tin-Zinc Alloy |
| Insulator | PTFE | |

TNC Jack (female) Connector PCB Through Holes Straight
 Solder Attachment DC-4GHz VSWR≤1.20

TNC2I50-2110A / H4

Mechanical Data

| | |
|-----------------------------------|--------------------|
| Coupling mechanisms | Screw-lock |
| Mating Cycles | ≥ 500 |
| Centre Contact | Soldered |
| Captivated Type | Mechanical |
| Center Contact Captivation: axial | ≥ 15 N |
| Coupling Test Torque | 1.7 Nm max. |
| Recommended Torque | 0.46 Nm to 0.69 Nm |

Environmental Data

| | |
|---------------------|---------------------------------|
| Temperature Range | -65°C to +155°C |
| Thermal shock | MIL-STD-202, Meth. 107, Cond. B |
| Corrosion | MIL-STD-202, Meth. 101, Cond. B |
| Vibration | MIL-STD-202, Meth. 204, Cond.B |
| Shock | MIL-STD-202, Meth. 213, Cond. G |
| Moisture Resistance | MIL-STD-202, Meth. 106 |
| RoHS | compliant |

Packing

Single or 100