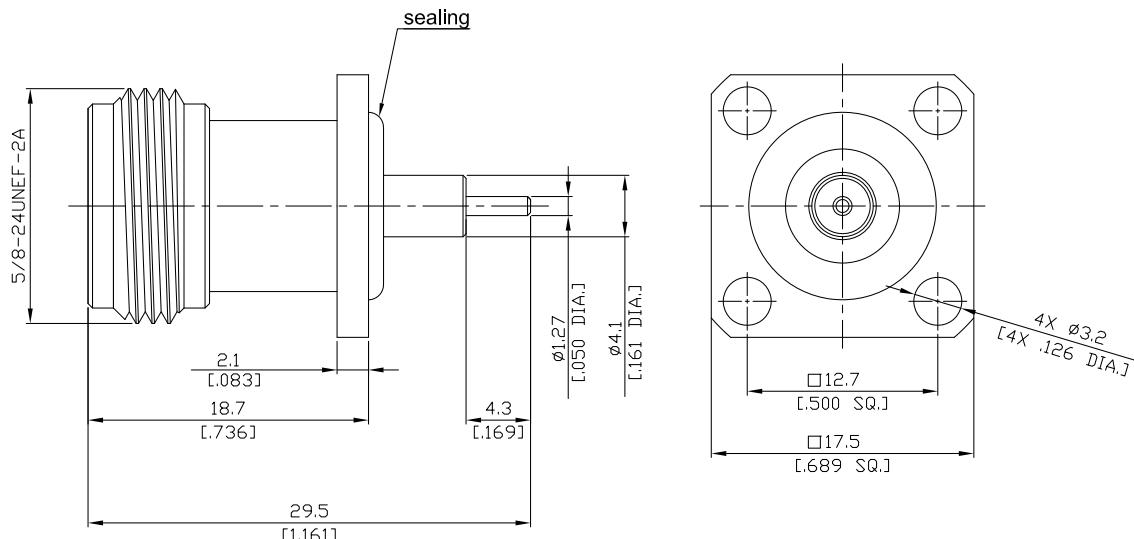


N Jack (Female) Connector Solder Attachment 4 Hole Flange Mount
 Stub Terminal, 12.7mm (.500 inch) Hole Spacing DC-11GHz VSWR1.20

N2GFA50-2950B / H4


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-16; MIL-STD-348B/304

Electrical Data

Impedance

50 Ω

Frequency

DC to 11 GHz

VSWR (Return Loss)

 ≤ 1.20 (≥ 20.83 dB)

Insertion Loss

 $\leq 0.1 \times \sqrt{f}$ (GHz) dB

Insulation Resistance

 $\geq 5 \text{ G}\Omega$

Center Contact Resistance

 $\leq 1 \text{ m}\Omega$

Outer Contact Resistance

 $\leq 0.25 \text{ m}\Omega$

Working Voltage (at sea level)

500 V rms

Power handling

1 GHz: 1000 W; 2 GHz: 700 W; 8 GHz: 300 W

Material And Plating

Piece Parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 μ inch (Non-magnetic nickel-phosphorus underplating, 80 μ inch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	

**N Jack (Female) Connector Solder Attachment 4 Hole Flange Mount
Stub Terminal, 12.7mm (.500 inch) Hole Spacing DC-11GHz VSWR1.20**

N2GFA50-2950B / H4

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Centre Contact	Soldered
Terminal Type	Stub
Captivated Type	Mechanical
Coupling Test Torque	1.7 Nm max.
Recommended Torque	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-55°C to +155°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond.D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100