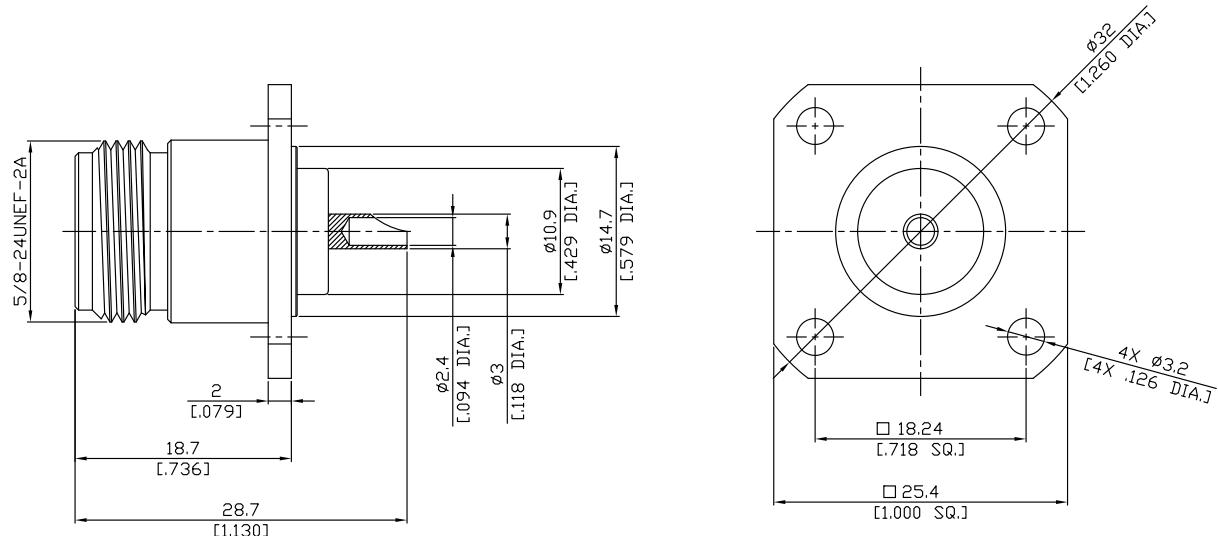


**N Jack (Female) Connector Solder Attachment 4 Hole Flange Mount
Solder cup Terminal, 18.24mm (.718 inch) Hole Spacing DC-11GHz VSWR1.20**
N2GFB50-2870A / H4


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-16; MIL-STD-348B/304

Electrical Data

Impedance

50 Ω

Frequency

DC to 11 GHz

VSWR (Return Loss)

≤ 1.20 (≥ 20.83 dB)

Insertion Loss

≤ 0.1 x \sqrt{f} (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 1 mΩ

Outer Contact Resistance

≤ 0.25 mΩ

Working Voltage (at sea level)

500 V rms

Power handling

1 GHz: 1000 W

2 GHz: 700 W

Material And Plating

Piece Parts

Material

Plating

Centre contact

Phosphor Bronze

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

Gasket

Silicone Rubber



**N Jack (Female) Connector Solder Attachment 4 Hole Flange Mount
Solder cup Terminal, 18.24mm (.718 inch) Hole Spacing DC-11GHz VSWR1.20**

N2GFB50-2870A / H4

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Centre Contact	Soldered
Terminal Type	Solder cup
Captivated Type	Mechanical
Coupling Test Torque	1.7 Nm max.
Recommended Torque	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-55°C to +155°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond.D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100