


N R/P Jack (Female) Connector Solder Attachment 4 Hole Flange Mount
Stub Terminal, 12.7mm (.500 inch) Hole Spacing DC-6GHz VSWR1.22

N7GFA50-3370A / 14

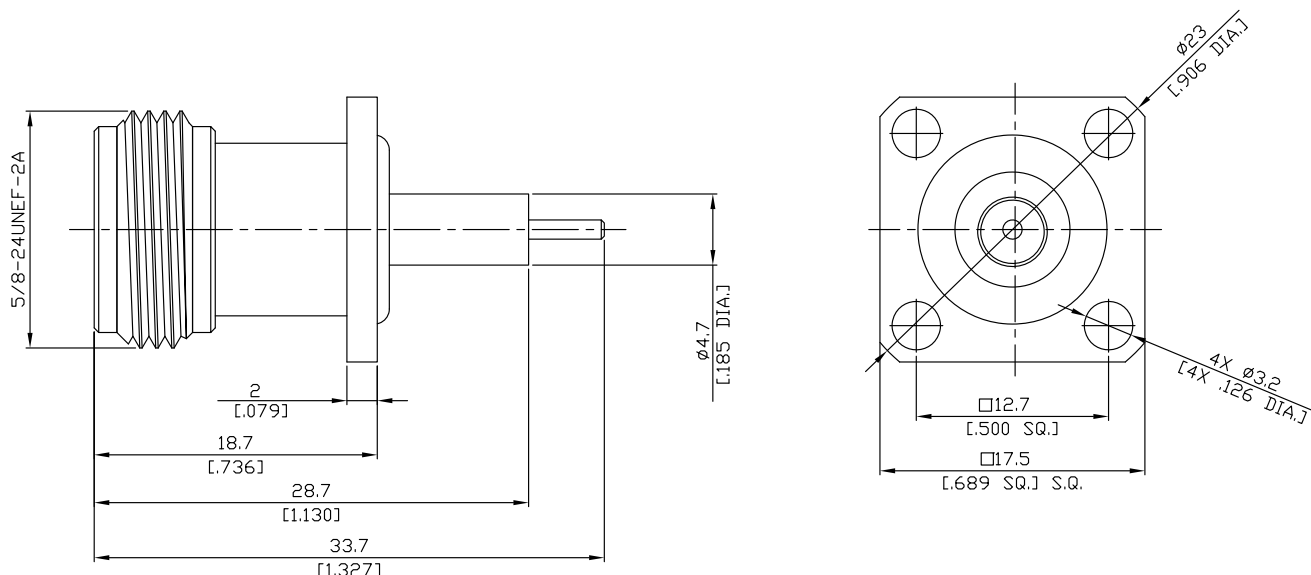

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-16; MIL-STD-348B/304

Electrical Data

Impedance	50 Ω	
Frequency	DC to 6 GHz	
VSWR (Return Loss)	≤1.22 (≥ 20 dB)	
Insertion Loss	≤ 0.05 dB, DC to 6 GHz	
Insulation Resistance	≥ 5 GΩ	
Center Contact Resistance	≤ 1 mΩ	
Outer Contact Resistance	≤ 0.25 mΩ	
Working Voltage (at sea level)	500 V rms	
Power handling	1000 W @ 1 GHz	700 W @ 2 GHz
RF-leakage	≤ 128 dB up to 1 GHz	

Material And Plating

Piece Parts	Material	Plating
Centre contact	Brass	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	

**N R/P Jack (Female) Connector Solder Attachment 4 Hole Flange Mount
Stub Terminal, 12.7mm (.500 inch) Hole Spacing DC-6GHz VSWR1.22**

N7GFA50-3370A / 14

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Centre Contact	Soldered
Terminal Type	Stub
Captivated Type	Mechanical
Coupling Test Torque	1.7 Nm max.
Recommended Torque	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-55°C to +155°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond.D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100