



 3.5mm Straight Panel Receptacle Jack
 (Coaxial End)

PC2GTA50-1026A-MPI/91

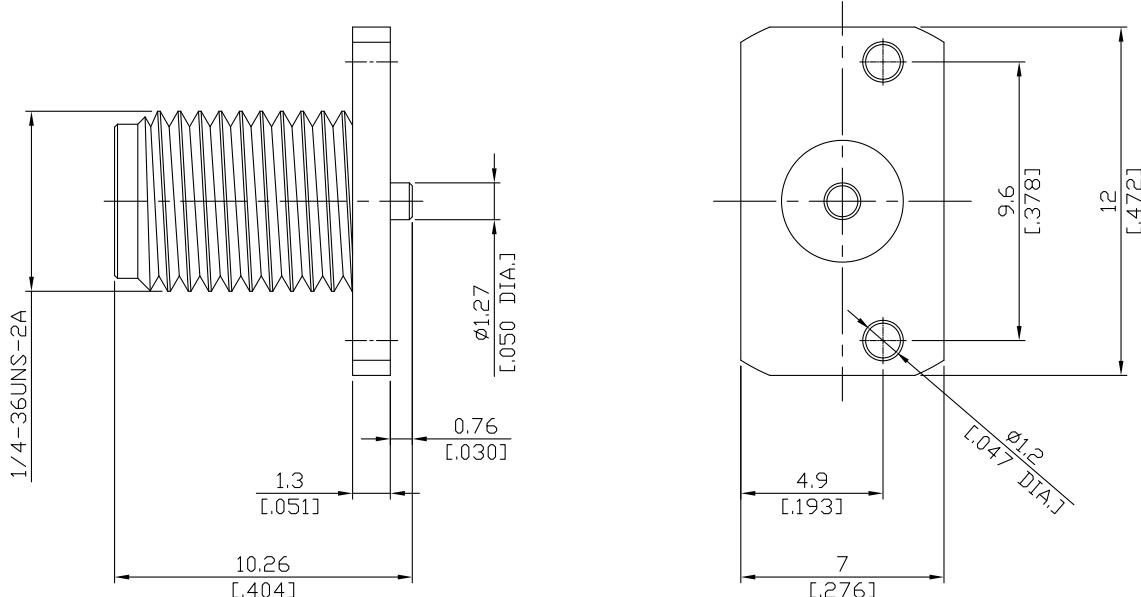

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

MIL-C-39012;MIL-STD-348A/310

Electrical Data

Impedance

50 Ω

Frequency

DC to 26.5 GHz

VSWR (Return Loss)

 ≤ 1.2 (≥ 20.83 dB)

Insertion Loss

 $\leq 0.05 \times \sqrt{f} \text{ (GHz)} \text{ dB}$
Mechanical Data

Coupling mechanisms

Screw-lock

Weight

N/A

Environmental Data

Temperature range

-65°C to +165°C

RoHS

compliant

Material And Plating

Piece Parts

Material

Plating

Centre contact

Beryllium Copper

Gold plating(Nickel underplated)

Body

Brass

Gold plating(Nickel underplated)

Insulator

PS

Packing

Single or 100