


2.4mm jack (female) Connector Solder Attachment 2 Hole Flange Mount
Stub Terminal, 12.2mm (.480 inch) Hole Spacing DC-50GHz VSWR1.15

Q2GTA50-1380C / 9X

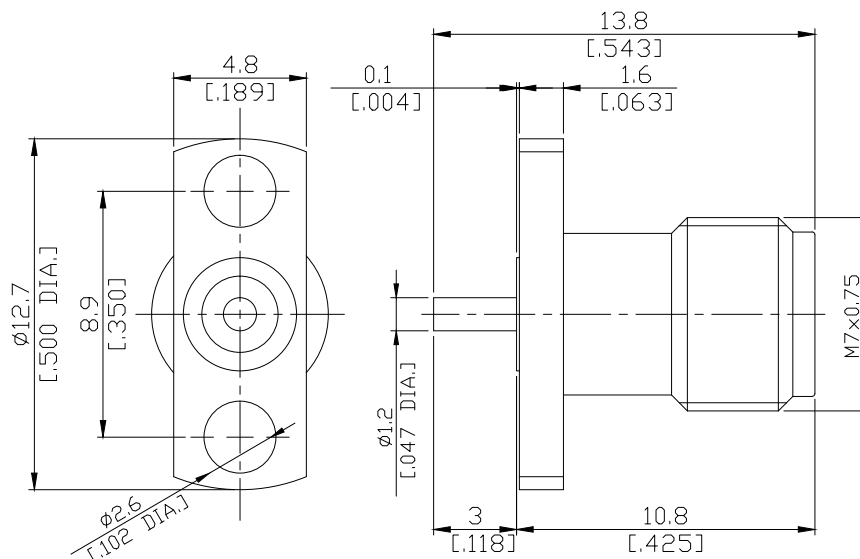

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-40

Mechanically compatible with

1.85mm

Electrical Data

Impedance

 $50\ \Omega$

Frequency

DC to 50 GHz

VSWR (Return Loss)

 ≤ 1.15 (≥ 23 dB)

Insertion Loss

$$\leq 0.05 \times \sqrt{F \text{ (GHz)}} \text{ dB}$$

Insulation Resistance

 $\geq 5 \text{ G}\Omega$

Test Voltage

500 V rms

Working Voltage (at sea level)

150 V_{rms}

Power Handling (at 20 °C, sea level, VSWR 1.0)

 $\leq 100 \text{ W @ } 1 \text{ GHz}$

Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PEI/PTFE	

2.4mm jack (female) Connector Solder Attachment 2 Hole Flange Mount
Stub Terminal, 12.2mm (.480 inch) Hole Spacing DC-50GHz VSWR1.15

Q2GTA50-1380C / 9X

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Centre Contact	Soldered
Terminal Type	Stub
Captivated Type	Mechanical Captivation
Center contact captivation	≥ 20 N
Coupling test torque	1.65 Nm
Recommended torque	0.80 Nm to 1.10 Nm

Environmental Data

Temperature Range	-40°C to +85°C
Thermal shock	IEC 61169-1, Subclause 9.4.4
Corrosion	IEC 61169-1, Subclause 9.4.6
Vibration	IEC 61169-1, Subclause 9.3.3
Shock	IEC 61169-1, Subclause 9.3.14
Moisture Resistance	IEC 61169-1, Subclause 9.4.3
RoHS	compliant

Packing

Single or 100