


SMA jack (female) Connector Solder Attachment 4 Hole Flange Mount  
Stub Terminal, 8.64mm (.340 inch) Hole Spacing DC-18GHz VSWR 1.30

## SMA2GFA50-1250A / 9X

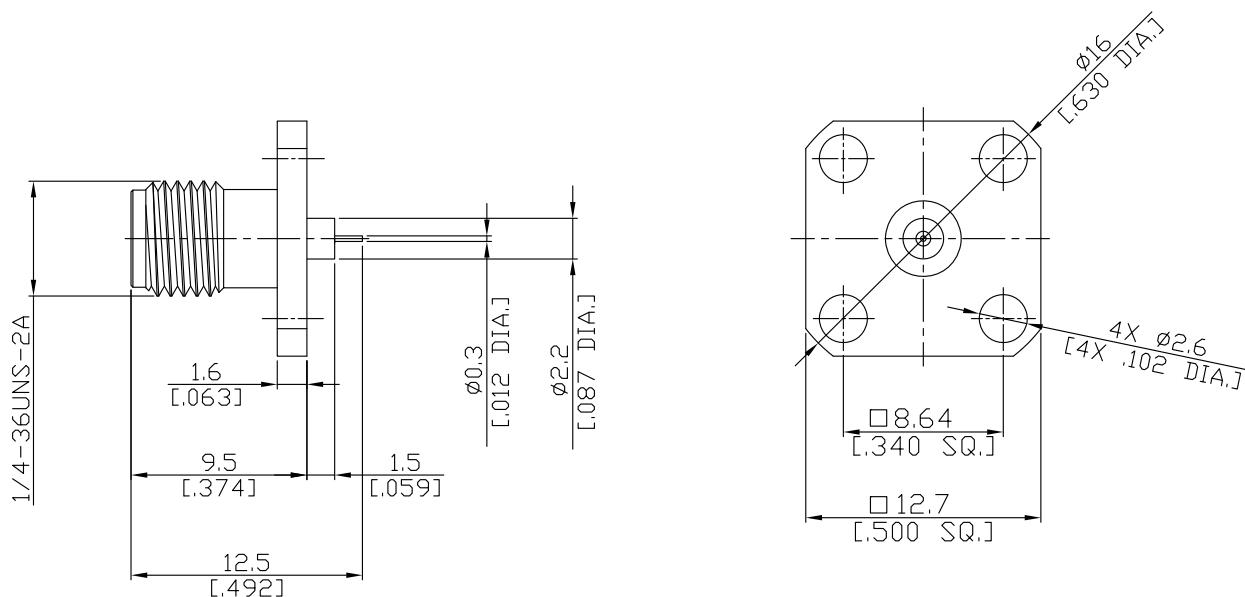

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

According to

IEC 61169-15; MIL-STD-348B/310

### Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.30 (≥ 17.7 dB)

Insertion Loss

≤ 0.05 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 3 mΩ

Outer Contact Resistance

≤ 2 mΩ

Test Voltage

1000 V rms

Working Voltage (at sea level)

480 V rms

Power Handling (at 20 °C, sea level, VSWR 1.0)

≤ 200 W @ 2 GHz

### Material And Plating

| Piece Parts    | Material         | Plating  |
|----------------|------------------|--|
| Centre contact | Beryllium Copper | Gold plating, 3 µinch<br>(Non-magnetic nickel-phosphorus underplating, 80 µinch) |
| Body           | Stainless Steel  | Passivated   |
| Insulator      | PTFE             |  |

SMA jack (female) Connector Solder Attachment 4 Hole Flange Mount Stub Terminal, 8.64mm (.340 inch) Hole Spacing DC-18GHz VSWR1.30

## SMA2GFA50-1250A / 9X

## Mechanical Data

## Environmental Data

|                     |                                 |
|---------------------|---------------------------------|
| Temperature Range   | -65°C to +165°C                 |
| Thermal shock       | MIL-STD-202, Meth. 107, Cond. B |
| Corrosion           | MIL-STD-202, Meth. 101, Cond. B |
| Vibration           | MIL-STD-202, Meth. 204, Cond. D |
| Shock               | MIL-STD-202, Meth. 213, Cond. I |
| Moisture Resistance | MIL-STD-202, Meth. 106          |
| RoHS                | compliant                       |

## Packing

Single or 100