


SMA Jack (Female) Connector Solder Attachment 2 Hole Flange Mount
Stub Terminal, 12.22mm (.481 inch) Hole Spacing DC-18GHz VSWR1.30

SMA2GTA50-1350A / 9X

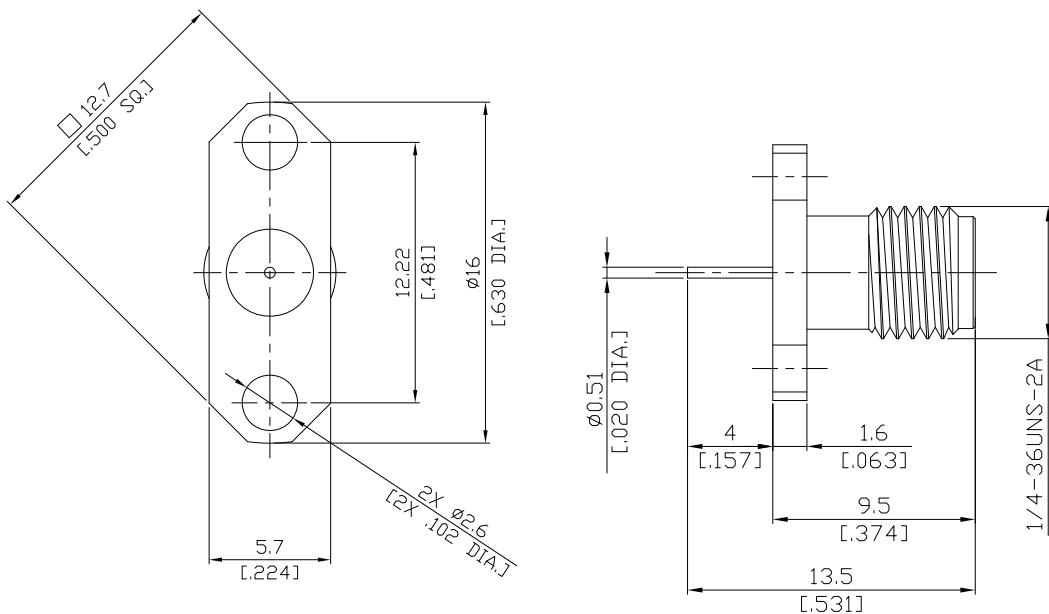

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-15; MIL-STD-348B/310

Electrical Data

| | |
|--|----------------------|
| Impedance | 50 Ω |
| Frequency | DC to 18 GHz |
| VSWR (Return Loss) | ≤ 1.30 (≥ 17.7 dB) |
| Insertion Loss | ≤ 0.05 x √F (GHz) dB |
| Insulation Resistance | ≥ 5 GΩ |
| Center Contact Resistance | ≤ 3 mΩ |
| Outer Contact Resistance | ≤ 2 mΩ |
| Test Voltage | 1000 V rms |
| Working Voltage (at sea level) | 480 V rms |
| Power Handling (at 20 °C, sea level, VSWR 1.0) | ≤ 200 W @ 2 GHz |

Material And Plating

| Piece Parts | Material | Plating |
|----------------|------------------|--|
| Centre contact | Beryllium Copper | Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch) |
| Body | Stainless Steel. | Passivated |
| Insulator | PTFE | |

SMA Jack (Female) Connector Solder Attachment 2 Hole Flange Mount
Stub Terminal, 12.22mm (.481 inch) Hole Spacing DC-18GHz VSWR1.30

SMA2GTA50-1350A / 9X

Mechanical Data

| | | |
|----------------------|------------------------------|---|
| Coupling mechanisms | Screw-lock | |
| Mating Cycles | ≥ 500 | |
| Centre Contact | Soldered | |
| Terminal Type | Stub | |
| Captivated Type | Mechanical | |
| Center Contact | Captivation: axial radial | $\geq 27 \text{ N}$ $\geq 3 \text{ Ncm}$ |
| Coupling Test Torque | max. 1.7 Nm | |
| Recommended Torque | 0.8 Nm to 1.1 Nm | |

Recommended Folioque Environmental Data

| | |
|---------------------|---------------------------------|
| Temperature Range | -65°C to +165°C |
| Thermal shock | MIL-STD-202, Meth. 107, Cond. B |
| Corrosion | MIL-STD-202, Meth. 101, Cond. B |
| Vibration | MIL-STD-202, Meth. 204, Cond. D |
| Shock | MIL-STD-202, Meth. 213, Cond. I |
| Moisture Resistance | MIL-STD-202, Meth. 106 |
| RoHS | compliant |

Packing

Single or 100