


SMA Jack (Female) Connector Solder Attachment 2 Hole Flange Mount Solder Cup Terminal,  
12.22mm (.481 inch) Hole Spacing Epoxy Captivated DC-18GHz VSWR1.30

## SMA2GTB50-1550A-EC / 9X

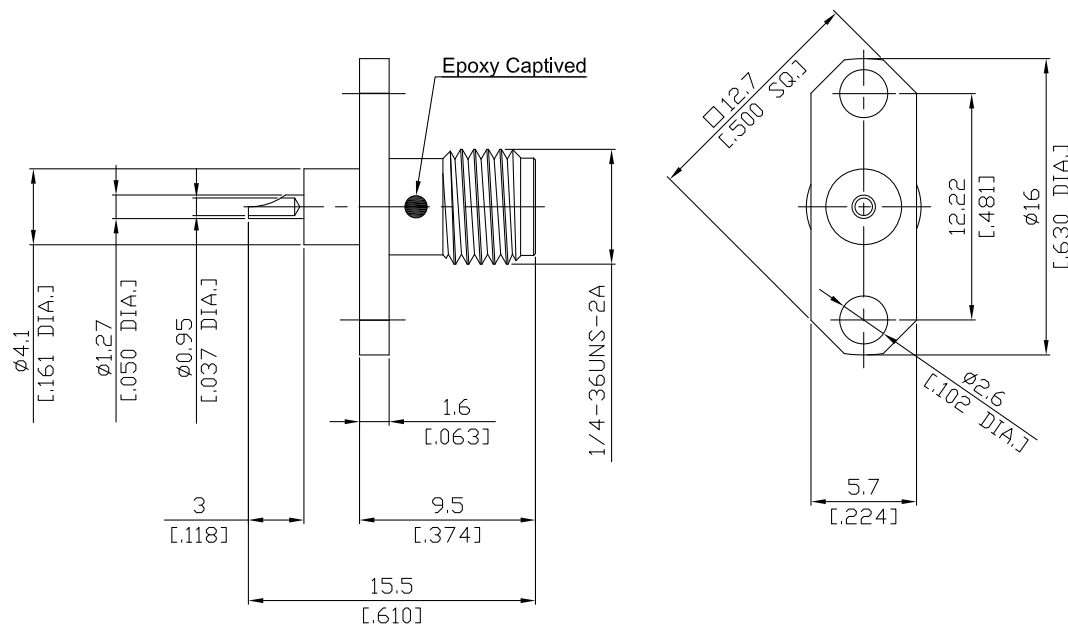

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

According to

IEC 61169-15; MIL-STD-348B/310

### Electrical Data

|                                                |                                      |
|------------------------------------------------|--------------------------------------|
| Impedance                                      | 50 $\Omega$                          |
| Frequency                                      | DC to 18 GHz                         |
| VSWR (Return Loss)                             | $\leq 1.30$ ( $\geq 17.7$ dB)        |
| Insertion Loss                                 | $\leq 0.05 \times \sqrt{F}$ (GHz) dB |
| Insulation Resistance                          | $\geq 5$ G $\Omega$                  |
| Center Contact Resistance                      | $\leq 3$ m $\Omega$                  |
| Outer Contact Resistance                       | $\leq 2$ m $\Omega$                  |
| Test Voltage                                   | 1000 V rms                           |
| Working Voltage (at sea level)                 | 480 V rms                            |
| Power Handling (at 20 °C, sea level, VSWR 1.0) | $\leq 200$ W @ 2 GHz                 |

### Material And Plating

| Piece Parts    | Material         | Plating                                                                                    |
|----------------|------------------|--------------------------------------------------------------------------------------------|
| Centre contact | Beryllium Copper | Gold plating, 3 $\mu$ inch<br>(Non-magnetic nickel-phosphorus underplating, 80 $\mu$ inch) |
| Body           | Stainless Steel  | Passivated                                                                                 |
| Insulator      | PTFE             |                                                                                            |

SMA Jack (Female) Connector Solder Attachment 2 Hole Flange Mount Solder Cup Terminal,  
12.22mm (.481 inch) Hole Spacing Epoxy Captivated DC-18GHz VSWR1.30

## SMA2GTB50-1550A-EC / 9X

### Mechanical Data

|                                   |                  |
|-----------------------------------|------------------|
| Coupling mechanisms               | Screw-lock       |
| Mating Cycles                     | ≥ 500            |
| Centre Contact                    | Soldered         |
| Terminal Type                     | Solder Cup       |
| Captivated Type                   | Epoxy            |
| Center Contact Captivation: axial | ≥ 27 N           |
| radial                            | ≥ 3 Ncm          |
| Coupling Test Torque              | max. 1.7 Nm      |
| Recommended Torque                | 0.8 Nm to 1.1 Nm |

### Environmental Data

|                     |                                 |
|---------------------|---------------------------------|
| Temperature Range   | -65°C to +165°C                 |
| Thermal shock       | MIL-STD-202, Meth. 107, Cond. B |
| Corrosion           | MIL-STD-202, Meth. 101, Cond. B |
| Vibration           | MIL-STD-202, Meth. 204, Cond.D  |
| Shock               | MIL-STD-202, Meth. 213, Cond. I |
| Moisture Resistance | MIL-STD-202, Meth. 106          |
| RoHS                | compliant                       |

### Packing

Single or 100