



SMP Plug limited Detent Connector Solder Attachment 2 Hole Flange Mount
Stub Terminal, 12.22mm (.481 inch) Hole Spacing

SMP1GTA50-LD1477A / 91

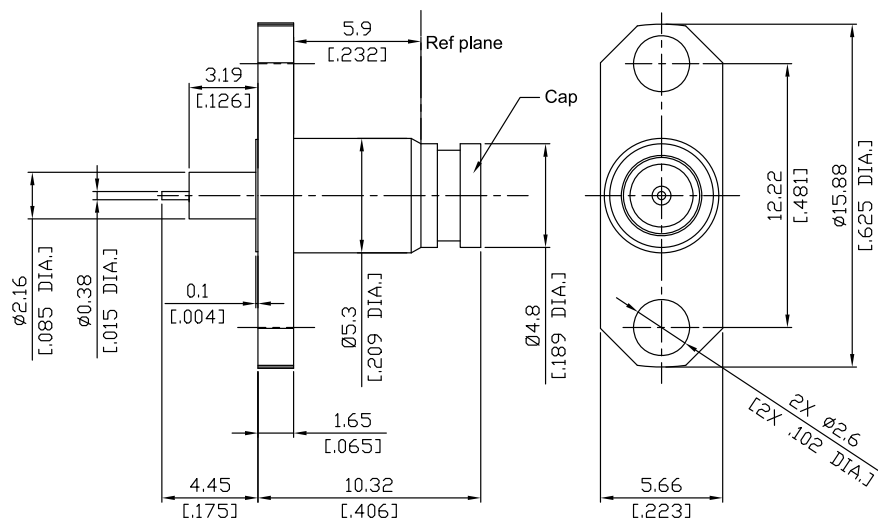

	mm		inch	
	Max.	Min.	Max.	Min.
A	2.3	2.22	.091	.087
B	2.7	2.6	.106	.102
C	12.32	12.12	.485	.477

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

MIL-STD-348A/326 (Limited Detent)

Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.2 (≥ 20.83 dB)

Insertion Loss

≤ 0.1 x √f (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 6.0 mΩ

Outer Contact Resistance

≤ 2.0 mΩ

Working Voltage (at sea level)

335 V rms

-VSWR in application depends decisive on cable assembly process-

Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Insulator	PTFE	

SMP Plug limited Detent Connector Solder Attachment 2 Hole Flange Mount
Stub Terminal, 12.22mm (.481 inch) Hole Spacing

SMP1GTA50-LD1477A / 91

Mechanical Data

Coupling mechanisms	Snap-lock
Mating Cycles	≥ 500
Center contact captivation	≥ 7N
Engagement force - Limited detent	≤ 45N
Disengagement force- Limited detent	≥ 9N

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition A
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100