


7/16 Jack (female) Panel Connector Solder Attachment 4 Hole Flange Mount
Solder Cup Terminal, 24.8mm (.976 inch) Hole Spacing DC-7.5 GHz VSWR1.15

716-2GFB50-2810A / G4

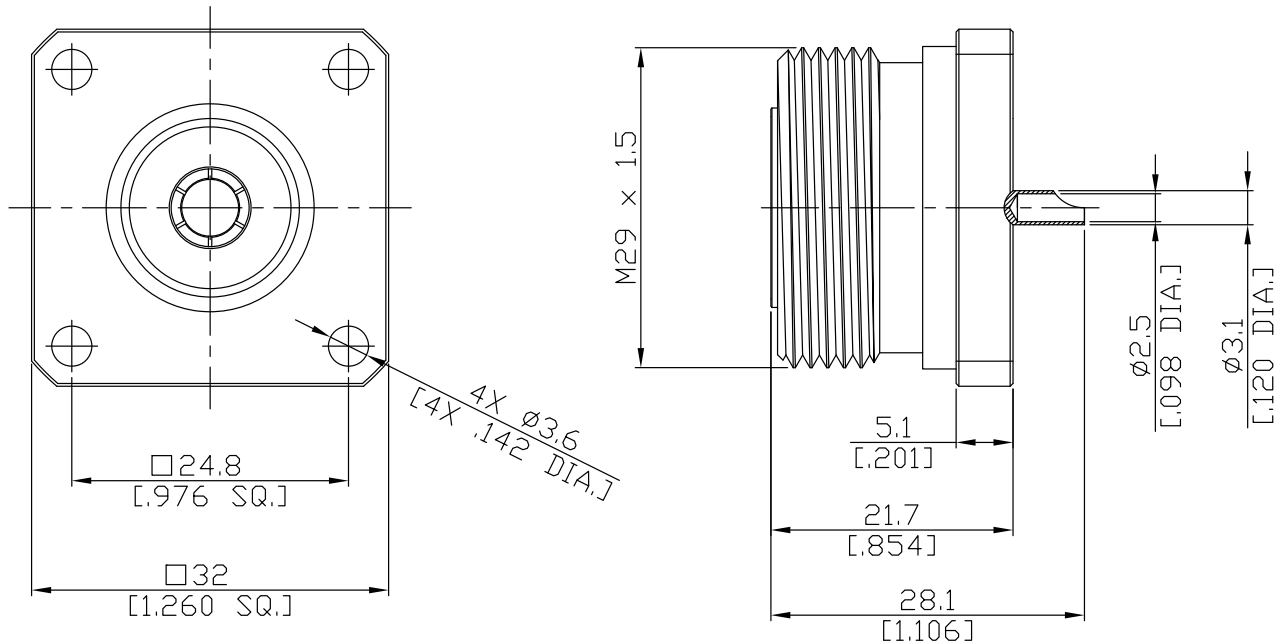

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

IEC 61169-4

Electrical Data

Impedance

50 Ω

Frequency

DC to 7.5 GHz

Dielectric withstanding voltage

4000 VRMS, min.

Mechanical Data

Coupling mechanisms

Screw-lock

Durability

500 cycles min.

Centre Contact

Soldered

Terminal Type

Solder Cup

Captivated Type

Mechanical

Environmental Data

Temperature Range

-40°C to +150°C

RoHS

compliant

Material And Plating

Piece Parts	Material	Plating
Centre contact	Phosphor Bronze	Silver
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

Packing

Singleor 100