



## Technical Data Sheet

SMP Plug Full Detent Connector Solder Attachment 2 Hole Flange Mount Stub Terminal, 8.99mm (.354 inch) Hole Spacing

# SMP1GTA50FD-0305A / -X

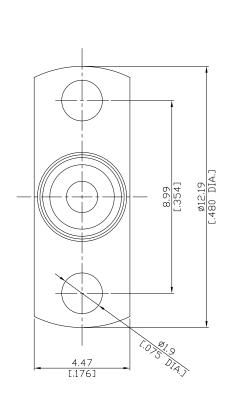

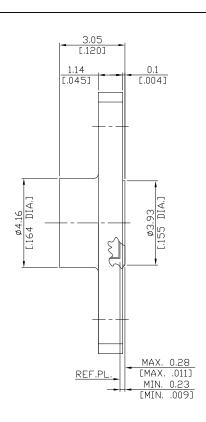

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

## Interface According to

nterface

### Mechanical Data

Coupling mechanisms

Mating Cycles

#### Environmental Data

Temperature Range Thermal shock Vibration Shock

Moisture Resistance

 $\mathsf{RoHS}$ 

MIL-STD-348B/326.2 (Full Detent)

Snap-lock ≥ 100

-65°C to +165°C

MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 204, Condition B MIL-STD-202, Method 213, Condition A

MIL-STD-202, Method 106

compliant

#### Material And Plating

Piece Parts Material Plating
Body Stainless Steel Passivated

Packing

Single or 100

The facts and figures herein are carefully compiled to the best of our
knowledge, but they are intended for general informational purposes only.
In the effort to improve our products, we reserve the right to make changes
judged to be necessary.

Kev	Rosnol RF/Microwave Technology Co., Ltd.
	www.rosnol.com; info@rosnol.com
Date:	Phone: +886-3-463-5095 / Fax: +886-3-463-5952
JUL/16/2021	Phone: +886-3-463-5095 / Fax: +886-3-463-5952 N-CAGE Code: SFKK0 / ISO9001 Certified