


30 W Gas Discharge Tube Surge Protector from DC to 2.5 GHz,
N Jack (Female) Bulkhead to SMA Jack (Female), 10KA

FGDT-A2N25A-BH-2.5G30W10KA / 9X-9X

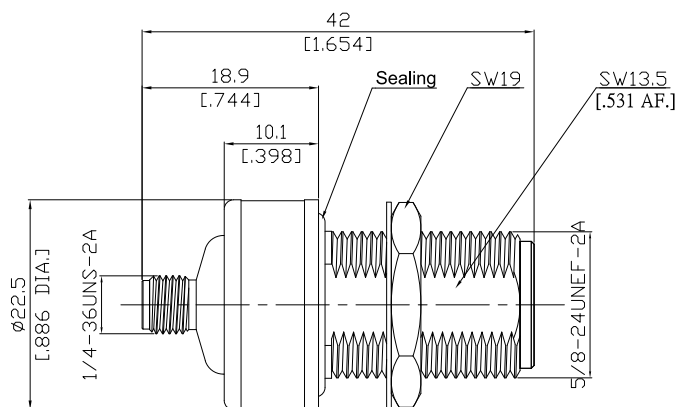

Mounting Dimension

	mm		inch	
	Max.	Min.	Max.	Min.
A	16.1	16	.634	.630
B	13.7	13.6	.539	.535

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

SMA according to

IEC 60169-15;CECC 22110; MIL-PRF-39012 SMA; MIL-STD-348/310

N according to

IEC 60169-16;MIL-STD-348/304;CECC 22 210

Electrical Data

Impedance

50 Ω

Frequency

DC to 2.5 GHz

VSWR (Return Loss)

≤ 1.30 (≥ 17.69 dB)

Insertion Loss

≤ 0.3dB

RF Power

30W max.

Protection

90V ±25%

Insulation resistance

≥ 5 GΩ

Center contact resistance

≤ 3 mΩ, SMA side

≤ 1 mΩ, N side

Outer contact resistance

≤ 2 mΩ, SMA side

≤ 0.25 mΩ, N side

Test voltage

1000 V rms

Working voltage

480 V rms

Power handling (at 20 °C, sea level, VSWR 1.0)

P=U²/R (W) (depending on the gas capsule)

Nominal impulse discharge current (8/20 μs)

10 kA

LET-THRU

644 Vpk / 500u J (Input 2kA 8x20 μs)

Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Fastening nut	Stainless Steel	Passivated
Washer	Stainless Steel	Passivated

30 W Gas Discharge Tube Surge Protector from DC to 2.5 GHz,
N Jack (Female) Bulkhead to SMA Jack (Female), 10KA

FGDT-A2N25A-BH-2.5G30W10KA / 9X-9X

Mechanical Data

Coupling mechanisms	SMA side	N side
Mating cycles	Screw-lock	Screw-lock
Center contact captivation: axial	min. 500	min. 500
Coupling test torque	≥ 28 N	≥ 28 N
Recommended torque	max. 1.7 Nm	max. 1.7 Nm
	0.8 Nm to 1.1 Nm	0.7 Nm to 1.1 Nm

Environmental Data

Temperature Range	-55°C to +155°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
Degree of protection (mated pair)	IEC 60529, IP68
RoHS	compliant

Packing

Single or 100