


2.92mm Female Field Replaceable Connector 4 Hole Flange Mount .340 inch Hole Spacing, Hermetic Seal 0.015 inch, DC-40GHz VSWR1.25

HS-K2BF50-0015A / 9X

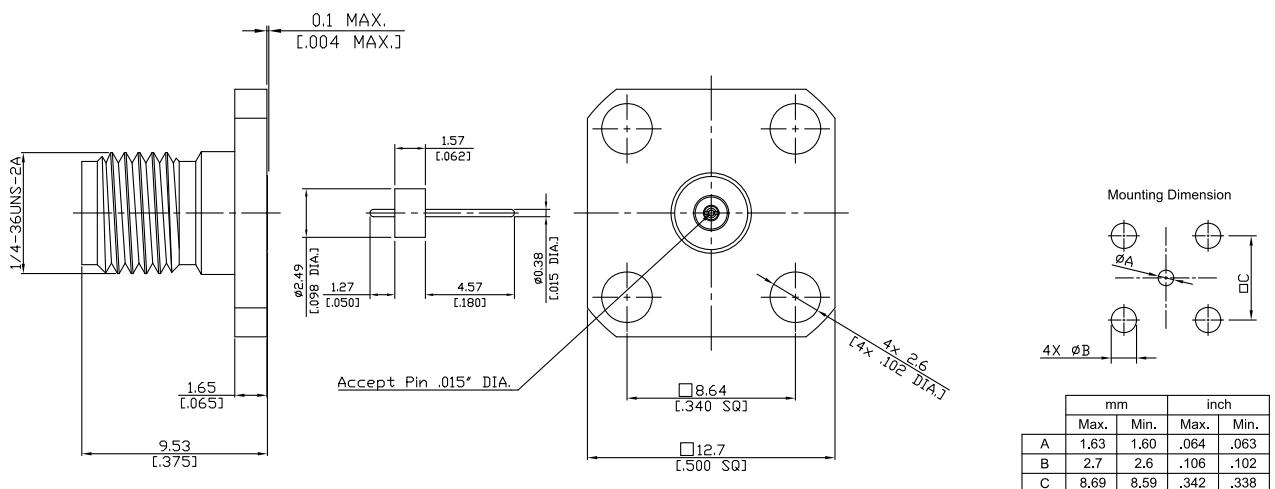

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-35; IEEE Std 287; MIL-STD-348A/323

Mechanically compatible with

SMA, 3.5mm

Electrical Data

Impedance

50 Ω

Frequency

DC to 40 GHz

VSWR (Return Loss)

≤ 1.25 (≥ 19.08 dB)

Insertion Loss

≤ 0.04 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 3.0 mΩ

Outer Contact Resistance

≤ 2.0 mΩ

Test Voltage

750 V rms

Working voltage

250 V rms

RF-leakage

≥ 100 dB up to 1 GHz

Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	
Piece Parts (Hermetic Seal)	Material	Plating
Centre contact	Kovar	Gold plating
Body	Kovar	Gold plating
Insulator	Corning 7070 Glass	

2.92mm Female Field Replaceable Connector 4 Hole Flange Mount .340 inch Hole Spacing, Hermetic Seal 0.015 inch, DC-40GHz VSWR1.25

HS-K2BF50-0015A / 9X

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Captivated Type	Mechanical
Center Contact Captivation: axial	≥ 20 N
Coupling Test Torque	1.70 Nm
Recommended Torque	0.80 Nm to 1.10 Nm

Environmental Data

Temperature Range	-40°C to +85°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond.D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100