


2.92mm Jack (Female) Connector 2 Straight Field Replaceable
10.16mm (.400 inch) Hole Spacing DC-40GHz VSWR1.15

K2BT50-0012E / 9X

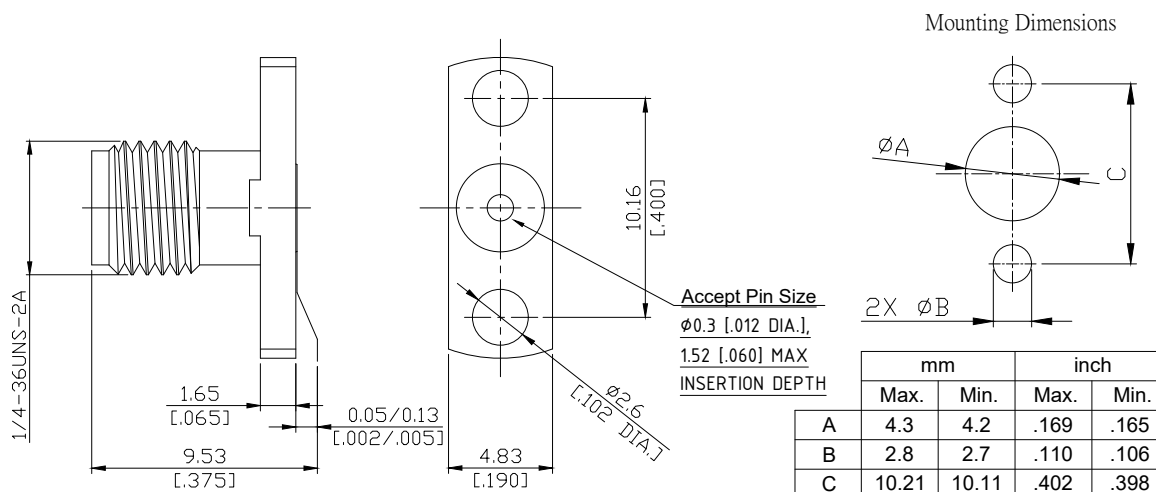

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-35, IEEE Std 287-2007

Electrical Data

Impedance	50 Ω
Frequency	DC to 40 GHz
VSWR (Return Loss)	≤ 1.15 (≥ 23.1 dB)
Insertion Loss	≤ 1.2 dB
Insulation Resistance	≥ 5 G Ω
Center Contact Resistance	≤ 3.0 m Ω
Outer Contact Resistance	≤ 2.0 m Ω
Test Voltage	750 V rms
Working voltage	250 V rms
RF-leakage	≥ 100 dB up to 1 GHz

Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch)
Body	Stainless Steel	Passivated
Insulator	PEI/PTFE	
Gasket	Silicone Rubber	

2.92mm Jack (Female) Connector 2 Straight Field Replaceable
10.16mm (.400 inch) Hole Spacing DC-40GHz VSWR1.15

K2BT50-0012E / 9X

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Captivated Type	Mechanical
Center Contact Captivation: axial	≥ 20 N
Coupling Test Torque	1.70 Nm
Recommended Torque	0.80 Nm to 1.10 Nm

Environmental Data

Temperature Range	-30°C to +70°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100