


Precision N Jack (Female) Field Replaceable Connector 4 Hole 17.45mm [.687 inch] Sq.
 Flange to Accept 0.914mm [.036 inch] DIA. Pin, DC-18GHz VSWR1.15

PCN2BF50-0036B / 9X

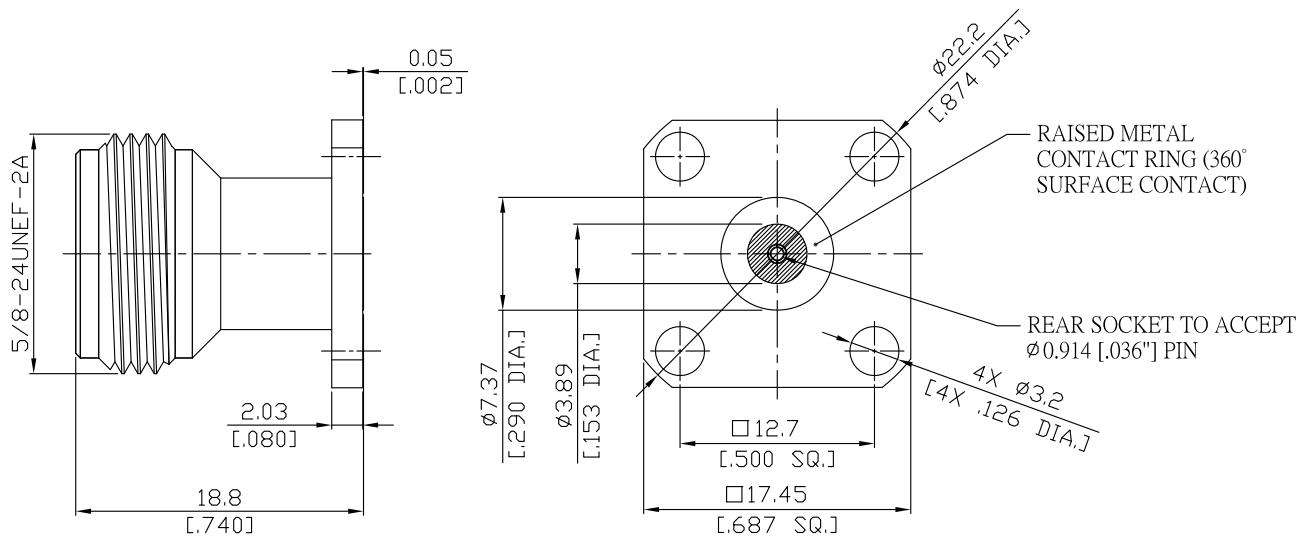

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-16, MIL-STD 348B/402

Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.15 (≥ 23.13 dB)

Insertion Loss

≤ 0.05 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 1 mΩ

Outer Contact Resistance

≤ 0.25 mΩ

Working Voltage

500 V rms

Power Handling (at 20 °C, sea level, VSWR 1.0)

1000 W @ 1 GHz

700 W @ 2 GHz

Material And Plating

Piece Parts	Material	Plating
Centre Contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	

Precision N Jack (Female) Field Replaceable Connector 4 Hole 17.45mm [.687 inch] Sq. Flange to Accept 0.914mm [.036 inch] DIA. Pin, DC-18GHz VSWR1.15

PCN2BF50-0036B / 9X

Mechanical Data

Environmental Data

Temperature Range	-55°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Standard	Single
Weight	N/A