


2.4mm Plug (male) Connector 4 Straight Field Replaceable  
8.6mm (.339 inch) Hole Spacing, DC-50GHz VSWR 1.15

**Q1BF50-0009A / 9XX**

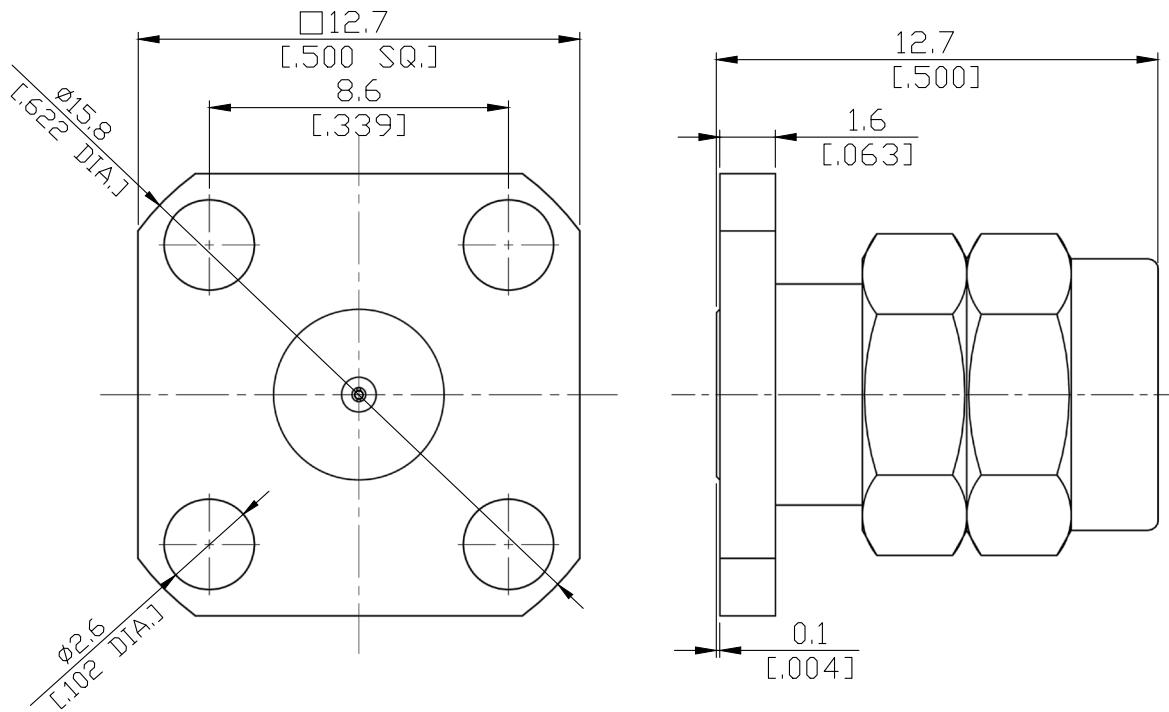

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

According to

IEC 61169-35 ; MIL-STD-348B/324

### Electrical Data

Impedance	50 Ω
Frequency	DC to 50 GHz
VSWR (Return loss)	≤1.15 (≥ 23.13 dB)
Insertion Loss	≤ 0.01 x √F (GHz) dB
Insulation Resistance	≥ 5 GΩ
Center Contact Resistance	≤ 3.0 mΩ
Outer Contact Resistance	≤ 2.0 mΩ
Test Voltage	750V rms
Working voltage	250 V rms
Power handling	≥ 100 dB up to 1 GHz

### Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Stainless Steel	Passivated
Insulator	PS	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated

2.4mm Plug (male) Connector 4 Straight Field Replaceable  
8.6mm (.339 inch) Hole Spacing, DC-50GHz VSWR 1.15

## Q1BF50-0009A / 9XX

### Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Captivated Type	Mechanical
Center Contact Captivation: axial	≥ 20 N
Coupling Test Torque	1.70 Nm
Recommended Torque	0.80 Nm to 1.10 Nm

### Environmental Data

Temperature Range	-55°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. G
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

### Packing

Single or 100