


2.4mm Jack (female) Connector 2 Straight Field Replaceable
12.22mm (.481 inch) Hole Spacing, DC-50GHz VSWR 1.15

Q2BT50-0012A / 9X

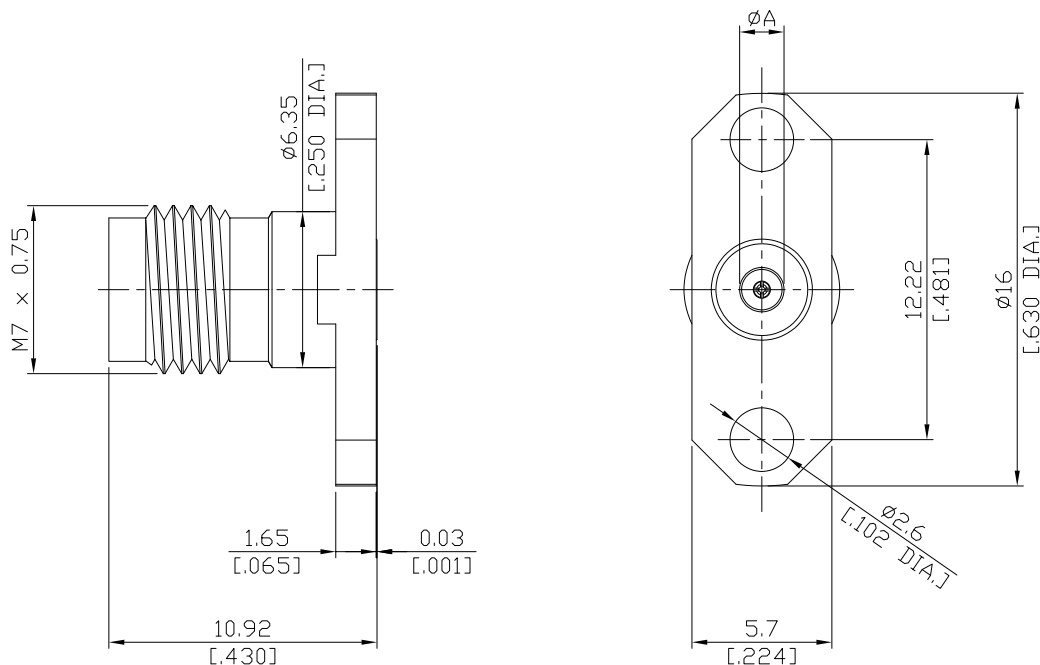

Rosnol P/N	Pin size	Max. pin depth	Ø A
Q2BT50-0020A/9X	0.51 [0.020]	1.65 [0.065]	1.65 [0.0651]
Q2BT50-0012A/9X	0.30 [0.012]	2.16 [0.085]	1.23 [0.0483]
Q2BT50-0009A/9X	0.23 [0.009]	1.65 [0.065]	1.07 [0.0421]

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-35 ; MIL-STD-348B/324

Electrical Data

Impedance	50 Ω
Frequency	DC to 50 GHz
VSWR (Return loss)	≤1.15 (≥ 23.13 dB)
Insertion Loss	≤ 0.01 x √F (GHz) dB
Insulation Resistance	≥ 5 GΩ
Center Contact Resistance	≤ 3.0 mΩ
Outer Contact Resistance	≤ 2.0 mΩ
Test Voltage	750V rms
Working voltage	250 V rms
Power handling	≥ 100 dB up to 1 GHz

Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch)
Body	Stainless Steel	Passivated
Insulator	PEI/PTFE	

2.4mm Jack (female) Connector 2 Straight Field Replaceable
12.22mm (.481 inch) Hole Spacing, DC-50GHz VSWR 1.15

Q2BT50-0012A / 9X

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Captivated Type	Mechanical
Center Contact Captivation: axial	≥ 20 N
Coupling Test Torque	1.70 Nm
Recommended Torque	0.80 Nm to 1.10 Nm

Environmental Data

Temperature Range	-55°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. G
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100