


2.4mm Jack (female) Connector 2 Straight Field Replaceable
8.9mm (.351 inch) Hole Spacing, DC-50GHz VSWR 1.15

Q2BT50-0012C / 9X

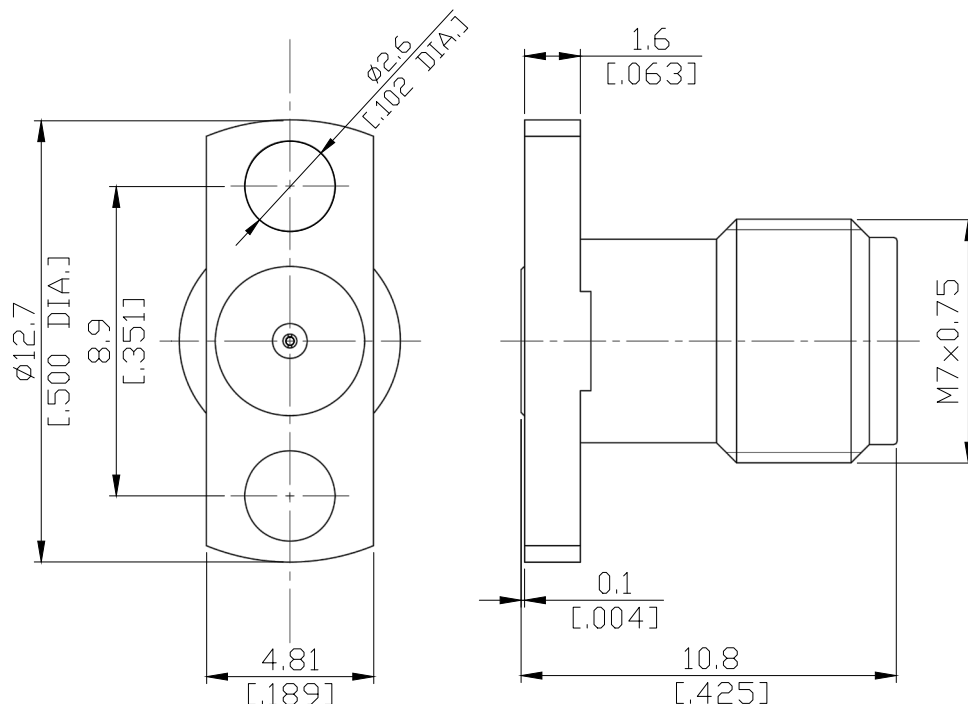

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-35 ; MIL-STD-348B/324

Electrical Data

Impedance	50 Ω
Frequency	DC to 50 GHz
VSWR (Return loss)	≤ 1.15 (≥ 23.13 dB)
Insertion Loss	$\leq 0.01 \times \sqrt{f}$ (GHz) dB
Insulation Resistance	≥ 5 G Ω
Center Contact Resistance	≤ 3.0 m Ω
Outer Contact Resistance	≤ 2.0 m Ω
Test Voltage	750V rms
Working voltage	250 V rms
Power handling	≥ 100 dB up to 1 GHz

Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 pinch)
Body	Stainless Steel	Passivated
Insulator	PEI/PTFE	

2.4mm Jack (female) Connector 2 Straight Field Replaceable
10.2mm (.402 inch) Hole Spacing, DC-50GHz VSWR 1.15

Q2BT50-0012C / 9X

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Captivated Type	Mechanical
Center Contact Captivation: axial	≥ 20 N
Coupling Test Torque	1.70 Nm
Recommended Torque	0.80 Nm to 1.10 Nm

Environmental Data

Temperature Range	-55°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. G
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100