


SMA Plug (male) Connector 4 Straight Field Replaceable
6.32mm (.249 inch) Hole Spacing DC-18GHz VSWR1.25

SMA1BF50-0018B / 9XX

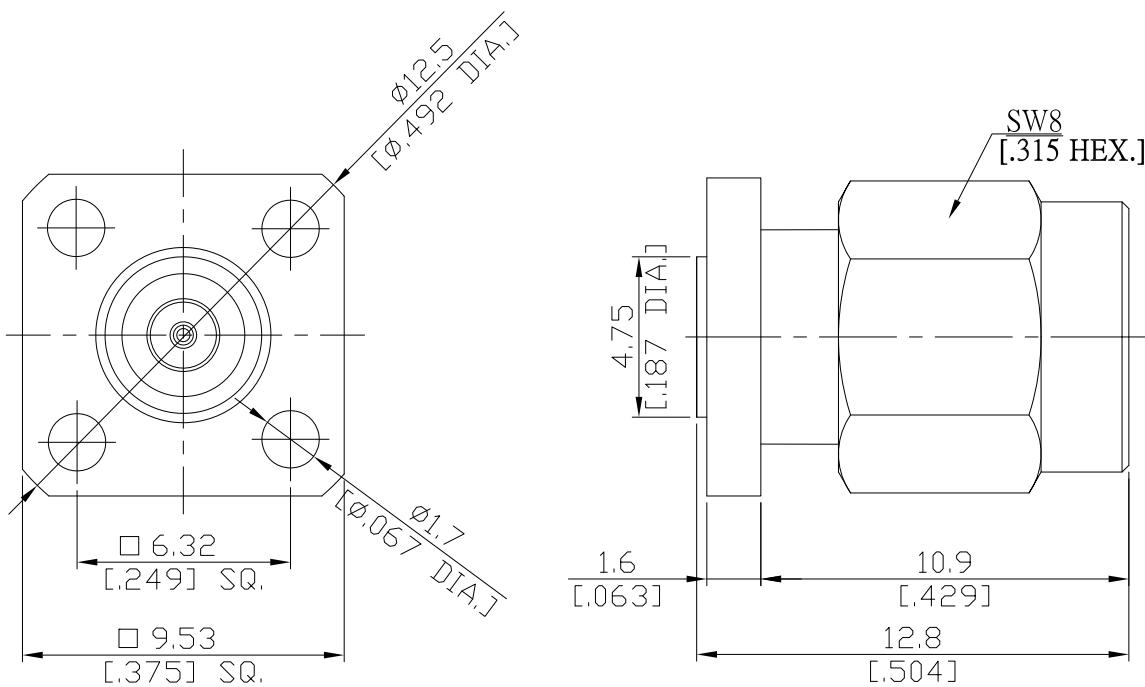

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-15; MIL-STD-348B/310

Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.25 (≥ 19.1 dB)

Insertion Loss

≤ 0.04 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 3.0 mΩ

Outer Contact Resistance

≤ 2.0 mΩ

Test Voltage

1000 V rms

Working voltage

480 V rms

Power handling

≤ 200 W @ 2 GHz

RF-leakage

≥ 100 dB up to 1 GHz

Material And Plating

Piece Parts

Material

Plating

Centre contact

Beryllium Copper

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Stainless Steel

Passivated

Insulator

PTFE

Gasket

Silicone Rubber

Coupling nut

Stainless Steel

Passivated

SMA Plug (male) Connector 4 Straight Field Replaceable
6.32mm (.249 inch) Hole Spacing DC-18GHz VSWR1.25

SMA1BF50-0018B / 9XX

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Captivated Type	Mechanical
Center Contact Captivation: axial	≥ 27 N
Coupling Test Torque	1.70 Nm
Recommended Torque	0.80 Nm to 1.1 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond.D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100