


SMA Jack (Female) Field Replaceable Connector with EMI Gasket  
 4 Hole Flange Mount 8.64mm (.340") Hole Spacing .012 Accept Pin DC-18GHz VSWR1.15

## SMA2BF50-0012A-EMI / 9X

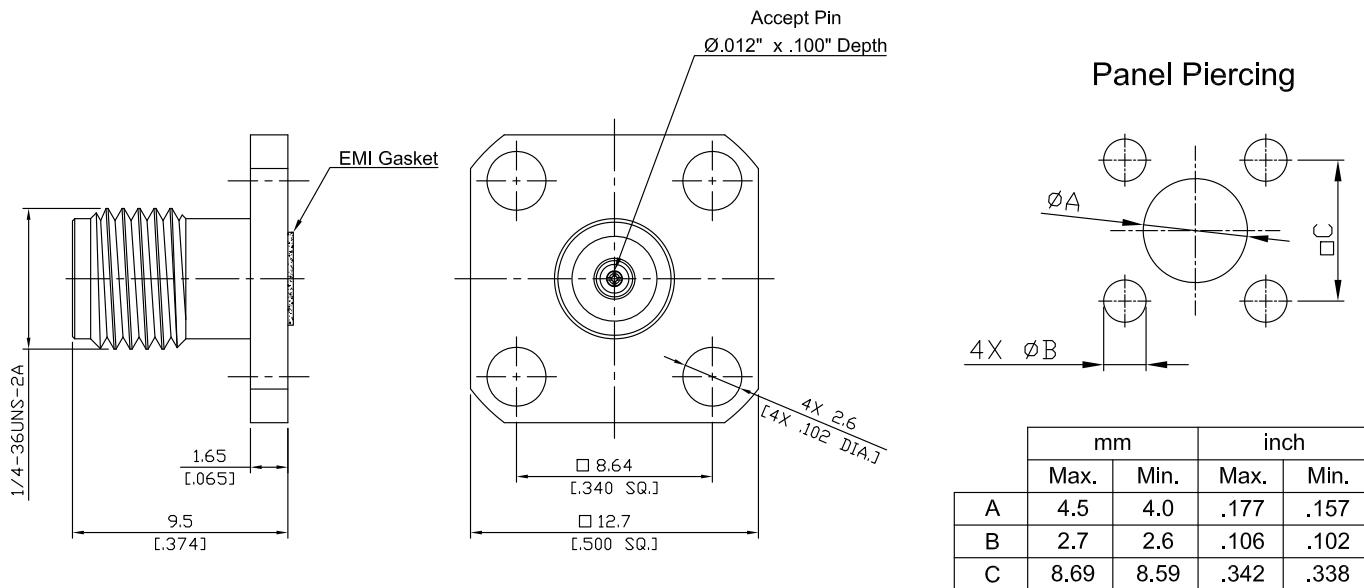

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

According to

IEC 60169-15; MIL-STD-348B/310

### Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.15 (≥ 23.13 dB)

Insertion Loss

≤ 0.05 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Center Contact Resistance

≤ 3.0 mΩ

Outer Contact Resistance

≤ 2.0 mΩ

Test Voltage

1000 V rms

Working voltage

480 V rms

Power handling

≤ 200 W @ 2 GHz

RF-leakage

≥ 100 dB up to 1 GHz

### Material And Plating

#### Piece Parts

#### Material

#### Plating

Centre contact

Beryllium Copper

Gold plating, 3 µinch  
 (Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Stainless Steel

Passivated

Insulator

PTFE

EMI Gasket

Conductive Silicone Elastomers

SMA Jack (Female) Field Replaceable Connector with EMI Gasket  
4 Hole Flange Mount 8.64mm (.340") Hole Spacing .012 Accept Pin DC-18GHz VSWR1.15

## SMA2BF50-0012A-EMI / 9X

### Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Captivated Type	Mechanical
Center Contact Captivation: axial	≥ 27 N
Coupling Test Torque	1.70 Nm
Recommended Torque	0.80 Nm to 1.1 Nm

### Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond.D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture Resistance	MIL-STD-202, Meth. 106
RoHS	compliant

### Packing

Single or 100