
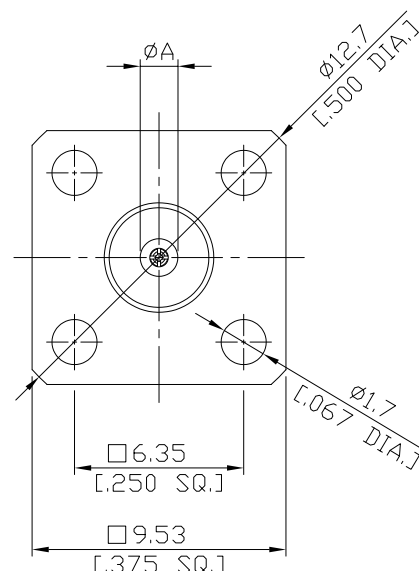


1.85mm Jack (female) Connector 4 Straight Field Replaceable
6.35mm (.250 inch) Hole Spacing, DC-67GHz VSWR 1.25

V2BF50-0012B / 9X

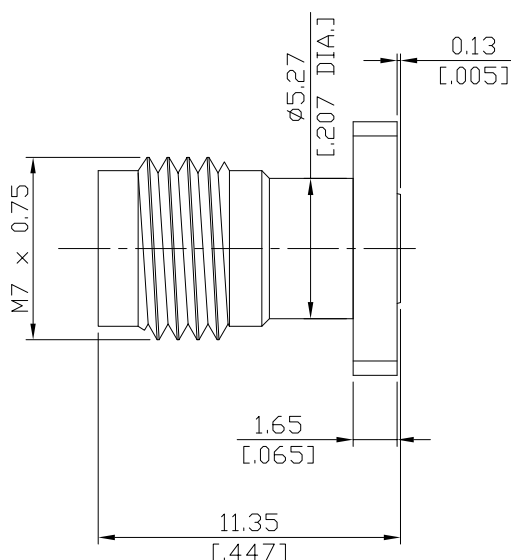

P/N	Accept Pin mm [inch]	Max. Pin Depth mm [inch]	ØA mm [inch]
V2BF50-0012B/9X	0.30 [.012]	1.65 [.065]	1.42 [.056]
V2BF50-0009B/9X	0.23 [.009]	1.65 [.065]	1.19 [.047]

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-32

Mechanically compatible with

2.40mm

Electrical Data

Impedance

50 Ω

Frequency

DC to 67 GHz

VSWR (Return loss)

≤ 1.25 (≥ 19.08 dB) up to 67 GHz

Insertion Loss

≤ 0.05 x √F (GHz) dB

Insulation Resistance

≥ 5 GΩ

Test Voltage

500V rms

Working voltage

150 V rms

Power handling

≥ 100 dB up to 1 GHz

Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PS	

1.85mm Jack (female) Connector 4 Straight Field Replaceable
6.35mm (.250 inch) Hole Spacing, DC-67GHz VSWR 1.25

V2BF50-0012B / 9X

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Captivated Type	Mechanical
Center Contact Captivation: axial	≥ 20 N
Coupling Test Torque	1.65 Nm
Recommended Torque	0.80 Nm to 1.10 Nm

Environmental Data

Temperature Range	-55°C to +165°C
Thermal shock	IEC 61169-1, Subclause 9.4.4
Corrosion	IEC 61169-1, Subclause 9.4.6
Vibration	IEC 61169-1, Subclause 9.3.3
Shock	IEC 61169-1, Subclause 9.3.14
Moisture Resistance	IEC 61169-1, Subclause 9.4.3
RoHS	compliant

Packing

Single or 100