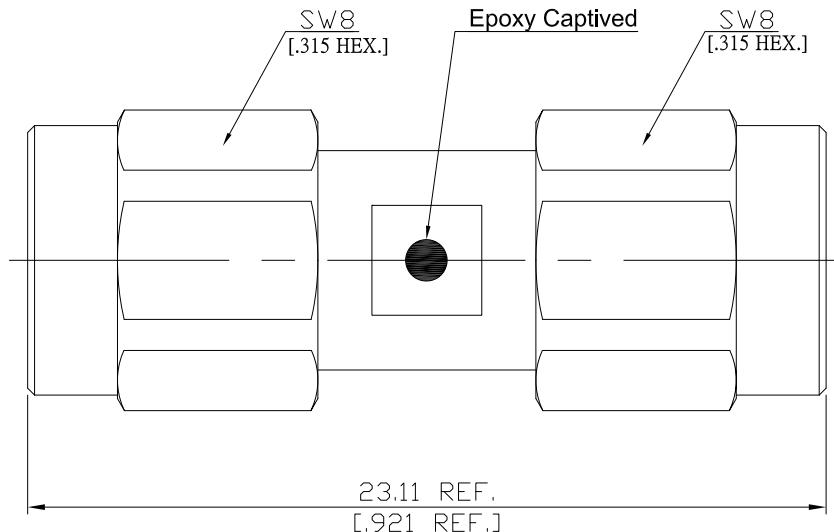


SMA pulg (male) / SMA pulg (male) Straight Adaptor  
 DC-18 GHz, VSWR ≤ 1.20

**AD-A1A15A-EC / 9XX-9XX**


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

according to

IEC 60169-15; MIL-STD-348B/310

**Electrical Data**

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR (Return Loss)	≤ 1.20 ( $\geq 20.83$ dB)
Insertion Loss	≤ 0.05 x $\sqrt{F}$ (GHz) dB
Insulation resistance	≥ 5 GΩ
Center contact resistance	≤ 3 mΩ
Outer contact resistance	≤ 2 mΩ
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling	≤ 200 W @ 2 GHz
RF-leakage	≥ 100 dB up to 1 GHz

**Material And Plating**

Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated
Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated

SMA pulg (male) / SMA pulg (male) Straight Adaptor  
DC-18 GHz, VSWR  $\leq$  1.20

AD-A1A15A-EC / 9XX-9XX

## Mechanical Data

Coupling mechanisms	Screw-lock
Mating cycles	$\geq 500$
Center contact captivation: axial	$\geq 27 \text{ N}$
radial	$\geq 3 \text{ Ncm}$
Coupling test torque	$\leq 1.7 \text{ Nm}$
Recommended torque	$0.8 \text{ Nm to } 1.1 \text{ Nm}$

## Environmental Data

Temperature Range	-65°C to +155°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

## Packing

Single or 100