


SMA Plug (Male) to SMA Jack (Female) Bulkhead Mount With Sealing Adapter
 DC-18GHz VSWR1.2

AD-A1A25A-BH / 999-99

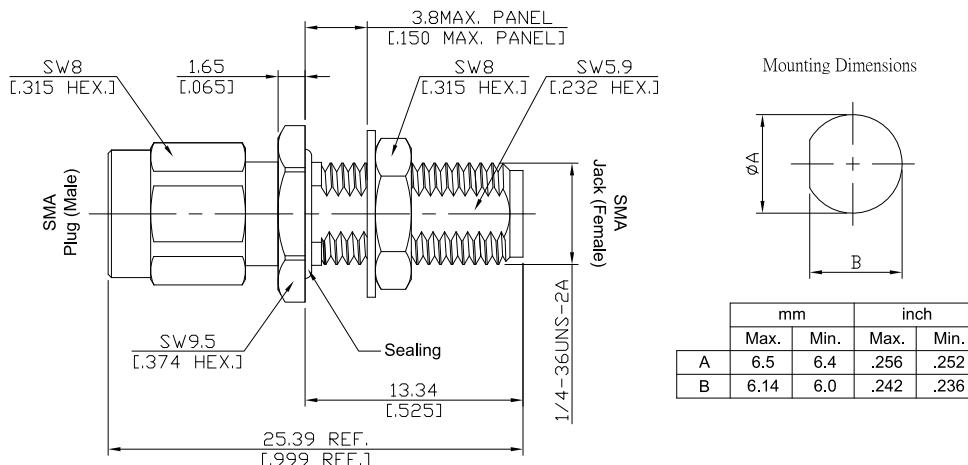

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-15; CECC 22110; MIL-PRF-39012; MIL-STD-348B/310; EN 122110

Electrical Data

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR (Return Loss)	≤ 1.20 (≥ 20.83 dB)
Insertion Loss	≤ 0.03 x √F (GHz) dB
Insulation resistance	≥ 5 GΩ
Center contact resistance	≤ 3 mΩ
Outer contact resistance	≤ 2 mΩ
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling	≤ 200 W @ 2 GHz
RF-leakage	≥ 100 dB up to 1 GHz

Material And Plating

Piece Parts (SMA)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Insulator	PTFE	
Coupling nut	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Gasket	Silicone Rubber	
Piece Parts (SMA)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Insulator	PTFE	
Fastening Nut	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Washer	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

 Rosnol RF/Microwave Technology Co., Ltd.
www.rosnol.com; info@rosnol.com

 Date:
 AUG/04/2025

 Phone: +886-3-463-5095 / Fax: +886-3-463-5952
 N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/2

SMA Plug (Male) to SMA Jack (Female) Bulkhead Mount With Sealing Adapter DC-18GHz VSWR1.2

AD-A1A25A-BH / 999-99

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	$\geq 27 \text{ N}$
radial	$\geq 3 \text{ Ncm}$
Coupling test torque	$\leq 1.7 \text{ Nm}$
Recommended Torque	0.8 Nm to 1.1 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100

CUSTOMER'S APPROVAL

**Department or
company's stamp**

Name: _____

Date:

**Copy and send back to
ROSNOL CORPORATION BEFORE:**

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:

Page 1 of 1

Rosnol RF/Microwave Technology Co., Ltd.
www.rosnol.com; info@rosnol.com

www.rosnol.com; info@rosnol.com
Phone: +886-3-463-5095 / Fax: +886-3-463-5952
NCGAGEC, I-SEKKO, ISO9001 Certified

Page

2/2